

# LED FIXTURE

## RIGID Series



## LED Flush Mount-2 Ring RGD-FM2/MW/MK/D/2R

LED 2 ring round ceiling light  
Multiple wattage and multiple kelvin selection



5-year limited warranty


Operating temperature range -20 °C ~ +40 °C



### Features & Benefits

cETLus rated, T24 Qualified  
Size 12", 14", and 16" available  
CRI >90, 120° beam spread  
Triac dimming 10% Minimum  
L70@ 50,000 Hrs, Non-IC rated  
Brushed nickel finish, Frosted Polycarbonate Lens  
Damp location rated

### Dimensional Drawing

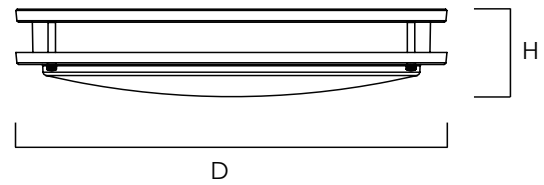

|            | M.O.D. | M.O.H. |
|------------|--------|--------|
| RGD-FM2/12 | 12"    | 2.87"  |
| RGD-FM2/14 | 14"    | 3.36"  |
| RGD-FM2/16 | 16"    | 3.78"  |

### Ordering Information Example: RGD-FM2/12/MW/MK/D/2R

| Family Name | Fixture Type                                                                                                         | Wattage               | CCT (Kelvin)         | Dimmable Option | Body        |
|-------------|----------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------|-----------------|-------------|
| RGD (Rigid) | FM2/12 (LED 12" flush mount 2 ring )<br>FM2/14 (LED 14" flush mount 2 ring )<br>FM2/16 (LED 16" flush mount 2 ring ) | MW (Multiple Wattage) | MK (Multiple Kelvin) | D (Dimmable)    | 2R (2 Ring) |

### Product Specification

| Ordering Code | Model Number          | Wattage (W) | Input Voltage (V) | Hour Rating | Initial Delivered Lumens (lumen) | CCT (K)        | CRI | Damp Location | M.O.D. (inch) | Dimmable | Case QTY. |
|---------------|-----------------------|-------------|-------------------|-------------|----------------------------------|----------------|-----|---------------|---------------|----------|-----------|
| 3662188       | RGD-FM2/12/MW/MK/D/2R | 22-18-15    | 120               | 50,000      | 1540-1260-1000                   | 27-30-35-40-50 | 90  | Yes           | 12            | Y        | 6         |
| 3662189       | RGD-FM2/14/MW/MK/D/2R | 24-21-18    | 120               | 50,000      | 1800-1575-1350                   | 27-30-35-40-50 | 90  | Yes           | 14            | Y        | 6         |
| 3662190       | RGD-FM2/16/MW/MK/D/2R | 24-21-18    | 120               | 50,000      | 2350-2000-1760                   | 27-30-35-40-50 | 90  | Yes           | 16            | Y        | 4         |