

## INSTRUCTIONS FOR THE FOLLOWING FIXTURES

ORDER#	MODEL#
R61204	RENO-EBP150W-U

## Package Contents

Part	Description	Quantity
1	Emergency Lighting	1
2	Hardware Kit	




## Warnings and Cautions

### IMPORTANT SAFEGUARDS READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances and the National Electric code
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Do not use outdoors.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surface.
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommend by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by qualified personnel only.
11. Allow battery to charge for 24 hours before first use.

## SAVE THESE INSTRUCTIONS

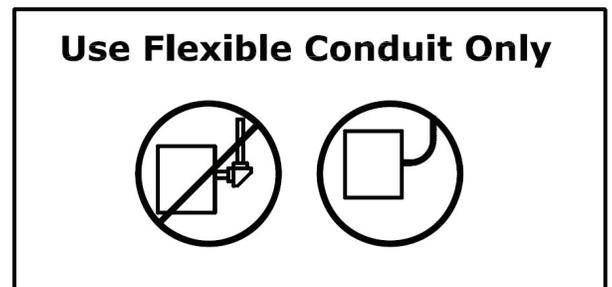


## Mounting Instructions


**NOTE: First turn off electricity.**

### Wall mounting

1. Remove the front cover with a screwdriver.

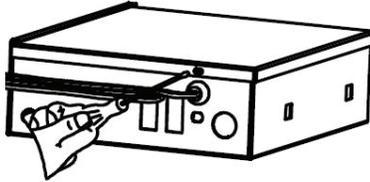

2. Knockout the back of the mounting plate and push wires through the hole.

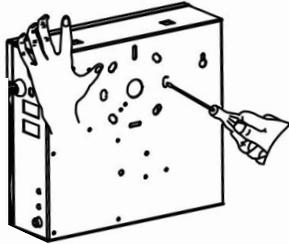


3. Securely attach the mounting plate to J-box

### 4. ELECTRICAL CONNECTIONS

Make the proper supply wire connections.

Connect the black, white and green wires to the building utility.

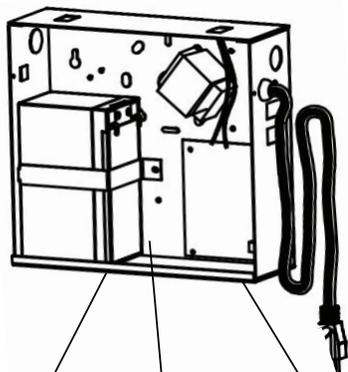


Black  
120-  
347VAC

White  
Neutral


Green  
Ground

5. Connect the battery to the connector on the PCBA.

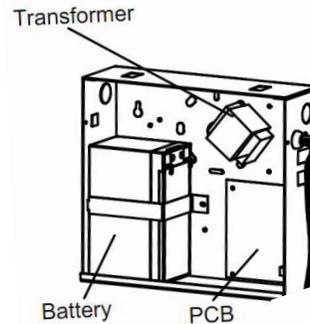

6. Snap fixture onto mounting plate and ensure no wires are pinched. Make sure unit is fully attached.

7. Remote head connection

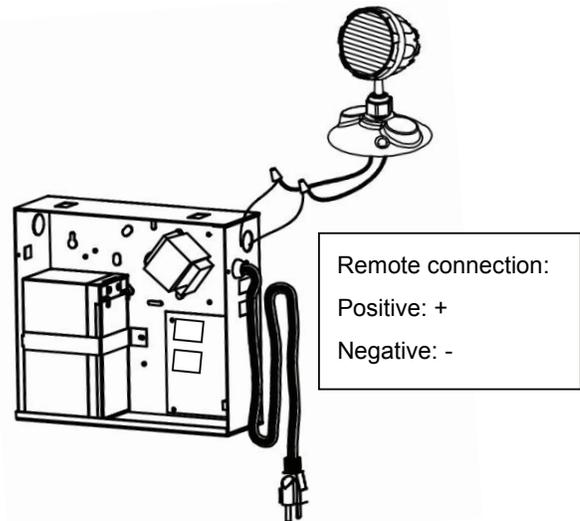

### Features:

Charging current: 400mA ± 50mA (battery voltage: 120V test)

Charging time: 22-24 hours

Overcharge protection voltage: 14.5±0.5V

Over discharge voltage: 10V ± 0.5V

Debug current: ≤30μA

Operating hours: ≥30 minutes

Maximum AC output power: 16W input current: 140mA

Output: 12V 150W

8. Restore power and press test button. AC light will turn off, remote heads will light up.