

24VDC Output Wet Location Power Supply Installation Instructions

BEFORE YOU START:


- Please check local electrical codes before beginning
- Turn power off before installing
- Make sure to use properly rated wire

PARTS INCLUDED:

- (1) Power Supply
- (2) Covers with Gaskets
- (8) Steel Screws for Covers
- (3) Line Voltage Connectors



NOTE: DO NOT INSTALL IN AN APPLICATION THAT IS OUTSIDE OF THE PRODUCTS LISTED AMBIENT TEMPERATURE OR IN AN AREA THAT IS NOT EASILY ACCESSIBLE FOR SERVICE REQUIREMENTS.

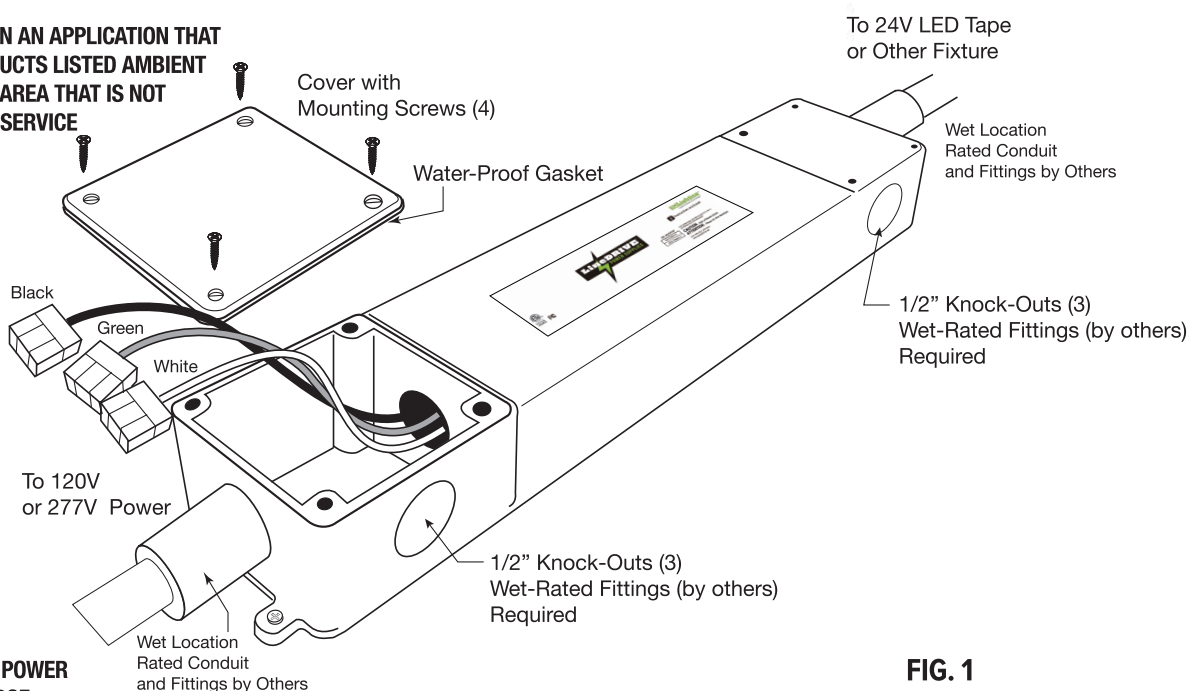

THIS IS A WET LOCATION POWER SUPPLY. DO NOT SUBMERGE IN WATER.

REFER TO DIAGRAMS AT RIGHT FOR COMPONENT IDENTIFICATION AND PROPER MOUNTING AND CONNECTING TO 24V LIGHTING FIXTURES.

1. MOUNTING. Remove Knock-Outs and use wet-rated fittings (by others). Mount LD-EDWP Power Supply Horizontally, a minimum of 12" from the ground. **(FIG. 1)**

2. CONNECTING TO 24V LED TAPE OR OTHER 24V FIXTURES. Connect Red (+) and Black (-) leads coming from power supply to matching (+) and (-) leads coming from tape. Use wire nuts (by others) or GM Lighting SureTite™ or Wet Location connectors to insure a reliable connection. **(FIG. 2).**

3. CONNECTING TO LINE VOLTAGE. Connect incoming 120/277V power (Black = line hot, White = neutral, Green = ground). **(FIG. 3).**

4. COMPLETING CONNECTIONS. Align corners of clean gasket with corners of cover plate and press into place completely. Gasket must be in place to provide a water tight seal. Repeat for other cover by placing cover over opening with gasket in place. Install 4 screws per cover to secure. Do not overtighten. **(FIG. 3).**

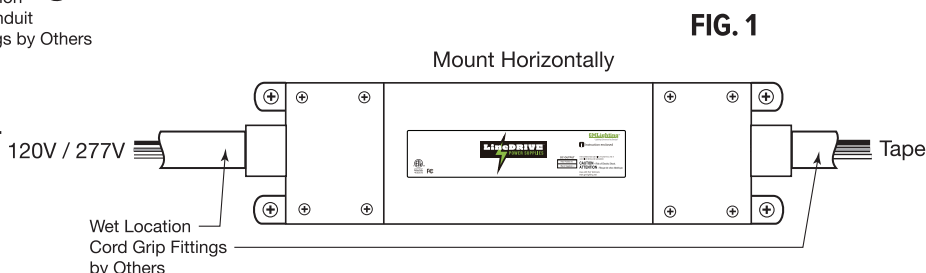


FIG. 2

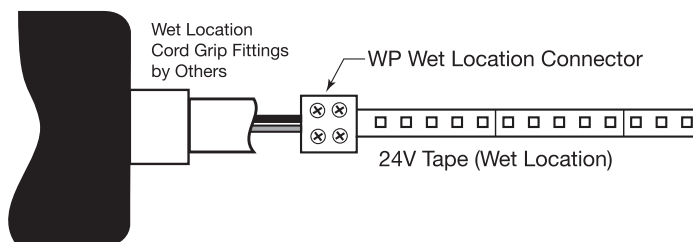


FIG. 3

