

<b>Date</b>		<b>Project</b>	
<b>Type</b>		<b>Part Number</b>	



ALL-IN-ONE PERFORMANCE LIGHTING

# BRILLIANCE Series

## Magnetic Trim Slim Downlight

The Magnetic Trim Slim Potlight is a unique retrofit application that allows users to install into existing 4" octagon junction boxes or 4" recessed cans. It offers a sleek, versatile design with magnetic trim covers (black or brushed nickel) that can be easily interchanged to achieve the perfect look for any space.



### PRODUCT FEATURES

- JA8 compliant
- Energystar Certified
- White trim included
- Interchangeable magnetic trims available: black or brushed nickel
- For use with a standard octagon junction box or 4" recessed housings (requires [R39112] Butterfly Clips and [R39113] E26 Base)
- IC-Rated and Air-Tight ready and may be in direct contact with insulation
- Flicker-free 120V forward-phase triac dimming down to 10%
- Operating temperature: -4°F to +104°F (-20°C to +40°C)
- Rated Lifespan: L70 ~50,000 hrs
- 5 year warranty

### KEY SPECIFICATIONS


<b>Voltage</b>	120V
<b>Wattage</b>	8W
<b>Size</b>	4"
<b>Power Factor</b>	>0.9
<b>CCT</b>	27/30/35/40/5000K
<b>CRI</b>	>90
<b>Lumens</b>	Up to 754 lm
<b>Beam Angle</b>	120°
<b>Dimming</b>	120V forward-phase TRIAC Dimming
<b>Mounting</b>	Standard Junction box or 4" Recessed Housing
<b>Applications</b>	Commercial, Residential, Retail Facilities


 EMERGENCY  
 BACKUP READY


## SPECIFICATIONS – 12W

Order#	Model	Wattage	Voltage	Lumens	Efficacy	CCT	Finish
R36019	RENO-4-S8W-5CCT-MRL-WH	8W	120V	663 lm	83 lm/W	2700K	White
				705 lm	88 lm/W	3000K	
				744 lm	93 lm/W	3500K	
				754 lm	94 lm/W	4000K	
				717 lm	90 lm/W	5000K	

## ACCESSORIES – MOUNTING



R39110  
RENO-4-MRL-TRIM-BK  
Black Magnetic Trim



R39111  
RENO-4-MRL-TRIM-BN  
Brushed Nickel Magnetic Trim



R39112  
RENO-4-ADAPTOR-CLIP  
Downlight Housing Retrofit Kit

Order#	Model	Description
R39110	RENO-4-MRL-TRIM-BK	Black Magnetic Trim
R39111	RENO-4-MRL-TRIM-BN	Brushed Nickel Magnetic Trim
R39112	RENO-4-ADAPTOR-CLIP	Downlight Housing Retrofit Kit (E26 Base adaptor & mounting accessories)

## ACCESSORIES – EMERGENCY LED DRIVERS




R83000  
 RENO-EM-H08  
 Emergency LED Driver  
 (100-347V AC, 50-60Hz, 12W)

Order#	Model	Description
R83000	RENO-EM-H08	Emergency LED Driver (100-347V AC, 50-60Hz, 12W)

## DIMENSIONS

4"

Diameter: Ø4.9" (125 mm)  
 Depth: 1.1" (28 mm)  
 Weight: 0.6 lbs (0.29 kg)

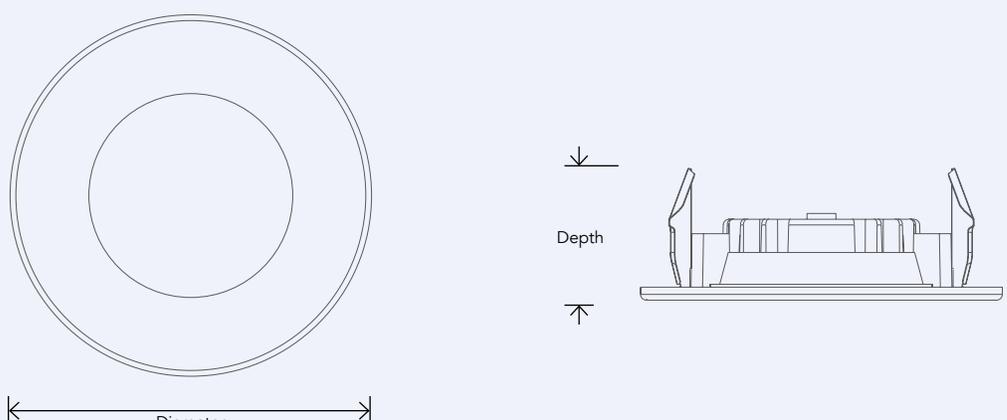

Diameter

Depth