



## FM SERIES DECORATIVE FLUSH MOUNT

### INSTALLATION INSTRUCTIONS

For use with:

LED Flush Mount Fixture

FM-LP1615-3 | FM-LP1615-MS-3

FM-LP1615-4 | FM-LP1615-MS-4

FM-LP1623-3 | FM-LP1623-MS-3

FM-LP1623-4 | FM-LP1623-MS-4



#### WHAT'S IN THE BOX

- LED FIXTURE
- WIRE CONNECTORS

#### WHAT YOU'LL NEED

- SAFETY GLASSES
- SCREW DRIVER
- WIRE CUTTERS
- WIRING SUPPLIES AS SPECIFIED BY CODE

#### WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- For indoor use only.
- Modifications to the product voids the warranty.

#### IMPORTANT

Before assembling your PREMISE LED fixture, please make sure that you carefully read through this instruction sheet. Consider having your fixture installed by a qualified licensed electrician.


**Note:** The important safeguards and instructions that appear in this sheet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care are factors that cannot be built into any product. These factors must be supplied by the person(s) caring for and operating the fixture.

PREMISE LED Inc.

82-86 Carrier Drive  
Toronto, ON Canada  
M9W 5R1

PREMISELED.COM

## FIXTURE DIAGRAM

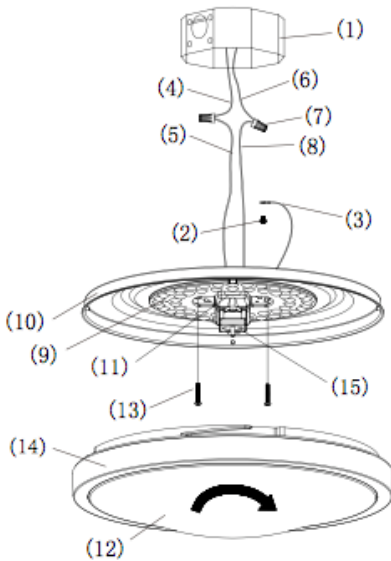

- |                        |                                      |
|------------------------|--------------------------------------|
| 1. Junction Box        | 8. Black Fixture Wire                |
| 2. Ground Screw        | 9. LED Board                         |
| 3. Fixture Ground Wire | 10. Fixture Housing                  |
| 4. White Supply Wire   | 11. LED Driver                       |
| 5. White Fixture Wire  | 12. Cover Lens                       |
| 6. Black Supply Wire   | 13. Fixture Screw                    |
| 7. Wire Connector      | 14. Top Ring                         |
|                        | 15. Motion Sensor<br>(MS model only) |

## INSTALLING THE FIXTURE

Our FM Series Flush Mount fixture is designed to be installed via a ceiling junction box.

1. Turn off the power.
2. Remove the cover lens (12) from the fixture housing (10). Position your fixture over the junction box (1).
3. Pull the supply wires and ground wire out from the junction box (1).
4. Connect the ground wire to the junction box by ground screw (2). Connect the white supply wire (4) to the white fixture wire (5), connect the black supply wire (6) to the black fixture wire (8) by using wire connectors (7). Then, carefully tuck all wires back into the junction box (1).
5. Locate the fixture housing (10) over the junction box (1). Put the fixture screw through the long hole slot on the fixture housing (10) and thread into the junction box (1). Then secure the fixture housing (10) to the junction box (1) by tightening the two fixture screws (13).
6. For Motion Sensor (MS) models, settings come preset to detect within a 10 foot radius, dim down to 20% brightness after 30 seconds of inaction, and completely turn off after one minute. For custom settings, please see the Motion Sensor Settings Guide.
7. Secure the cover lens (12) and the top ring to the fixture housing.