



Date		Project	
Type		Part Number	

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

CINEMA Series

Up & Down Semi-Circle Wall Pack



The Cinema Series Up & Down Semi-Circle Wall Pack is widely used on wet location like storage warehouses, steel mills, toll booth, waiting rooms, the platforms of railway station.



Product Features

- Self-replaceable lens
- 0-10V Dimming
- DC photocell comes as standard
- Waterproof rubber seal and glass lens brings an excellent waterproof performance
- Mounted via Bracket
- Dip switch for CCT & down/full light control
- IP65 rated, and saltwater resistant
- Operating temp: -40°F to +113°F (-40°C to +45°C)
- Rated lifetime L70: >50,000 hours
- 10 year limited warranty

Key Specifications

Voltage	120-347V
Wattage	R1 - 24/32/40W R2 - 48/64/80W
CCT	3000/4000/5000K
CRI	80
Power Factory	>0.9
Lumens	R1 - 5800-3480lm R2 - 11600-6960lm
Beam Angle	Type III
Application	Cabin, Sauna Room, Basement, porch, commercial and retail building, boathouse, movie theatre
Mounting	Wall mounting brackets (included)





LUMAFLEX Series | Up & Down Semi-Circle Wall Pack

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING



Specifications

Order#	Model	Wattage	Voltage	Lumens	CCT	CRI
R51051	RENO-UDSWP-MW-DV-MCCT-R1	24/32/40W	120-347V	3480/4640/5800lm	30/40/5000K	80
R51052	RENO-UDSWP-MW-DV-MCCT-R2	48/64/80W	120-347V	6960/9280/11,600lm	30/40/5000K	80

Certifications

Order#	Model	Application	DLC Standard	DLC Premium
R51051	RENO-UDSWP-MW-DV-MCCT-R1	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-9MS856
R51052	RENO-UDSWP-MW-DV-MCCT-R2	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-FRVTD7

Light Option

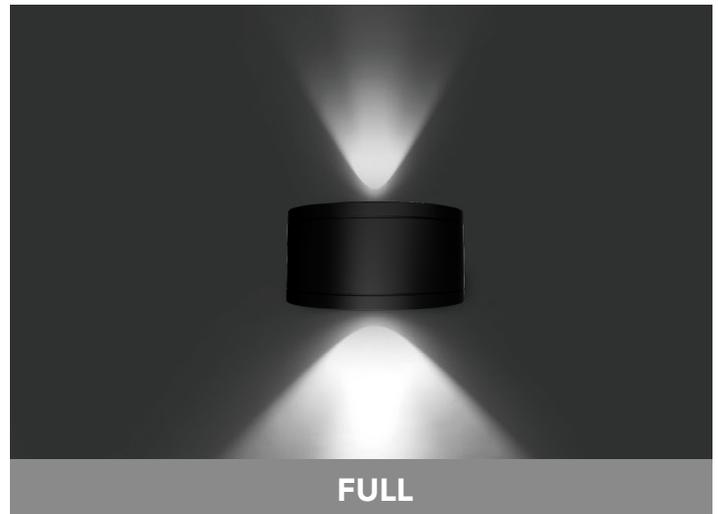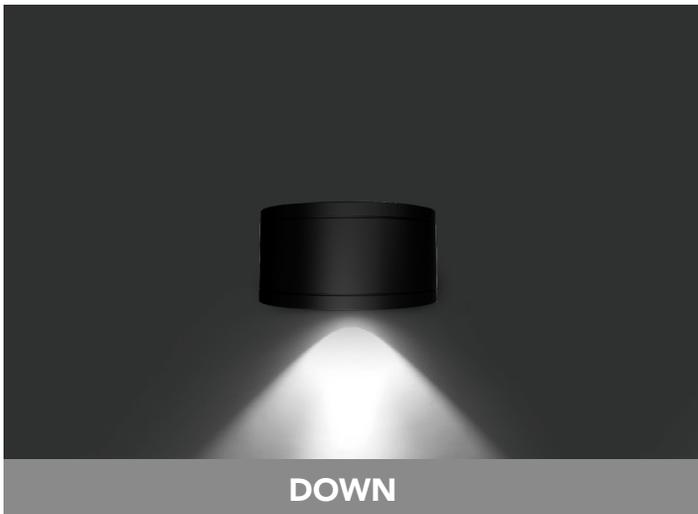



LUMAFLEX Series | Up & Down Semi-Circle Wall Pack

ARCHITECTURAL LUMINAIRES BY RENO LIGHTING

Accessories - Emergency Driver



R83010
RENO-EM-EX15
All weather emergency LED Driver

Order#	Model	Description
R83010	RENO-EM-EX15	External Mount ALL WEATHER EMERGENCY LED DRIVER

Dimensions

R1

Width: 13" (330 mm)
 Height: 6.5" (165mm)
 Length: 6.5" (165 mm)
 Weight: 7.4 lbs (3.4 kg)

R2

Width: 13" (330 mm)
 Height: 6.5" (165mm)
 Length: 6.5" (165 mm)
 Weight: 7.6 lbs (3.4 kg)

