



HIGHLIGHTS

24,000 to 48,000 lm

Up to 160 lm/W

120-277V & 277-480V

Includes 10' dimming and
power cord and mounting hook

White or Black Housing

Powder coated, die-cast
aluminum housing

Fixed Wattage & Fixed CCT

PowerSet & FieldCCeT

Controls Ready

DLC Premium

IP65 & NEMA 4X

Estimated L70: 100,000 Hours

HBX3

Premium Round High

HBX3

Premium Round High Bay

AVAILABLE MODELS

ORDER CODE	ITEM #	WATTS*	CCT**	LUMENS	EFFICACY (lm/W)	VOLTAGE	FINISH	TRADITIONAL WATTAGE EQUIVALENT (@ MAX WATTS)	DLC ID#
									PREMIUM
13553	HBX3-150-50-U	150W	5000K	24,000 lm	160 lm/W	120-277V	Black	Up to 400W HID	S-CVRA8J
13555	HBX3-PS150-40-U	150/130/100/80W	4000K	24,000/20,800/16,000/12,800 lm	160 lm/W	120-277V	Black	6 lamp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-60NOMZ
13556	HBX3-PS150-50-U	150/130/100/80W	5000K	24,000/20,800/16,000/12,800 lm	160 lm/W	120-277V	Black	6 lamp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-6PIFHT
13561	HBX3-PS150-40-V	150/130/100/80W	4000K	24,000/20,800/16,000/12,800 lm	160 lm/W	277-480V	Black	6 lamp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-NSOZEX
13562	HBX3-PS150-50-V	150/130/100/80W	5000K	24,000/20,800/16,000/12,800 lm	160 lm/W	277-480V	Black	6 lamp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-B13EZQ
13567	HBX3-PS150-FCCT-H	150/130/100/80W	4000/5000K	24,000/20,800/16,000/12,800 lm	160 lm/W	120-347V	Black	6 lamwp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-FLH9X8
13568	HBX3-PS150-FCCT-H-WH	150/130/100/80W	4000/5000K	24,000/20,800/16,000/12,800 lm	160 lm/W	120-347V	White	6 lamwp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-FLH9X8
13554	HBX3-200-50-U	200W	5000K	34,000 lm	160 lm/W	120-277V	Black	Up to 600W HID	S-B6GY8W
13557	HBX3-PS240-40-U	240/220/200/180W	4000K	38,400/35,200/32,000/28,800 lm	160 lm/W	120-277V	Black	6 lamp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-12BMOU
13558	HBX3-PS240-50-U	240/220/200/180W	5000K	38,400/35,200/32,000/28,800 lm	160 lm/W	120-277V	Black	6 lamp 4ft 32W T8 4 lamp 4ft 54W T5 400W HID	S-1IXQ9D
13563	HBX3-PS240-40-V	240/220/200/180W	4000K	38,400/35,200/32,000/28,800 lm	160 lm/W	277-480V	Black	6 lamp T5 HO 750W HID	S-25EGAB
13564	HBX3-PS240-50-V	240/220/200/180W	5000K	38,400/35,200/32,000/28,800 lm	160 lm/W	277-480V	Black	6 lamp T5 HO 750W HID	S-NFJ5AR
13569	HBX3-PS240-FCCT-H	240/220/200/180W	4000/5000K	38,400/35,200/32,000/28,800 lm	160 lm/W	120-347V	Black	6 lamp T5 HO 750W HID	S-423YB5
13570	HBX3-PS240-FCCT-H-WH	240/220/200/180W	4000/5000K	38,400/35,200/32,000/28,800 lm	160 lm/W	120-347V	White	6 lamp T5 HO 750W HID	S-423YB5
13559	HBX3-PS300-40-U	300/285/270/255W	4000K	48,000/45,600/43,200/40,800 lm	160 lm/W	120-277V	Black	1000W HID	S-3OV8PE
13560	HBX3-PS300-50-U	300/285/270/255W	5000K	48,000/45,600/43,200/40,800 lm	160 lm/W	120-277V	Black	1000W HID	S-CKO87T
13565	HBX3-PS300-40-V	300/285/270/255W	4000K	48,000/45,600/43,200/40,800 lm	160 lm/W	277-480V	Black	1000W HID	S-ME9I1H
13566	HBX3-PS300-50-V	300/285/270/255W	5000K	48,000/45,600/43,200/40,800 lm	160 lm/W	277-480V	Black	1000W HID	S-074YEN

* All power-selectable fixtures ship at the highest wattage setting

** All CCT-selectable fixtures ship at 4000K

CONTROLS & SENSORS: FIELD INSTALLED

+ORDER CODE	ITEM #	DESCRIPTION
STANDALONE CONTROLS		
PIR SENSORS		
801282	MSF-DPR-12	Stand-alone PIR Motion Sensor, 12V, Screw-in, 0-10V, Ambient Threshold, 20ft, Parameters set by RC02.
13342	SEN5A-SZPR-WH	Stand-alone PIR Motion Sensor, 12-24V, Z10, 0-10V, Daylight Harvesting, 40ft, White, Parameters set by SEN5A-ACT. Note: Screw-in to Z10 adaptor required: SENA-APZ-WH.
MICROWAVE SENSORS*		
801281	MSF-DMR-12	Stand-alone Microwave Motion Sensor, 12V, screw-in, 0-10V, Ambient Threshold, 49ft, Parameters set by RC02
11931	SEN5A/M/Z10	Stand-alone Microwave Motion Sensor, 12-24V, Z10, 0-10V, Ambient Threshold, 40ft, Parameters set by RC-100/SEN5A-ACT. Note: Screw-in to Z10 adaptor required: SENA-APZ-WH.
13341	SEN5A-SZMR-WH	Stand-alone Microwave Motion Sensor, 12-24V, Z10, 0-10V, Daylight Harvesting, 40ft, White, Parameters set by SEN5A-ACT. Note: Screw-in to Z10 adaptor required: SENA-APZ-WH.

* Microwave sensors must be installed on stable and immovable fixtures to avoid false activation from swinging.

REMOTES FOR COMMISSIONING STANDALONE CONTROLS		
13344	SEN5A-ACT	Commissioning Tool for SEN5A, BAY-E-SEN/PIR, BAY-E-SEN/M, and MS2-DPX-3 (Backward compatible with SEN5A/CT and RC-100)
800891	RC02	Commissioning Tool for programming HBX2, FL5, HBV2, LHB4 center pin motion sensors

NETWORKED LIGHTING CONTROLS (NLC)		
13246	SENA-WZPA-WH	BLE PIR Motion sensor, 12-24V, IP65, Z10, 0-10V, Daylight Harvesting, 40ft, Parameters set by Silvoir App. Note: Screw-in to Z10 adapter required: SENA-APZ-WH.
12643	PSC-ZKV-WCM-100-BLE-SR	BLE TruBle wireless fixture Controller, 12-24V, Z10, 0-10V, Parameters set by Silvoir App. Note: Screw-in to Z10 adapter required: SENA-APZ-WH.
WALL OR WIRELESS CONTROLLERS		
12654	ESRPB-W-EO	BLE Easyfit by EnOcean wireless self-powered kinetic Single rocker pad, white, wall plate included.
12655	EDRPB-W-EO	BLE Easyfit by EnOcean wireless self-powered kinetic Double rocker pad, white, wall plate included.
12635	PSC-DM-WS-100-BLE-SR	BLE TruBlu 120-277V, Single Gang Single Button Wall Controller, White, Parameters set by Silvoir App.
12636	PSC-DM-I-WS-100-BLE-SR	BLE TruBlu PIR Occupancy/ Vacancy Sensor, 120-277V, Single Gang Wall Controller, White, Parameters set by Silvoir App.
12637	PSC-DM-WS-400-BLE-SR	BLE TruBlu 4-Button Wall Controller, 120-277V, Single Gang, White, Parameters set by Silvoir App.
ADAPTERS & ACCESSORIES		
13467	SENA-APZ-WH	Z10 adaptor 1/2" Screw-in spring load pins to Z10 Receptacle IP65 White.
12994	PSC-RET-100-BLE-SR	BLE TruBlu Range Extender, 120-277V, 800ft, Nema 4X Outdoor Enclosure
12993	PSC-TKP-200-BLE-SR	BLE TruBlu Battery Backup Timekeeper and Range Extender, 120V, 800ft, Nema 4X Outdoor Enclosure

HBX3

Premium Round High



Hook Included



RoHS Compliant



CAN ICES-005

IP65



ACCESSORIES




REF1-AL



PA-12-



REF1-PC



WG1-S



REF1-CL

FACTORY MODS

CUSTOM CORD LENGTH & CORD ENDS:

- N01 : 125V 15A straight plug
- N02 : 250V 15A straight plug
- N04 : 125V 15A locking plug
- N05 : 250V 15A locking plug
- N06 : 277V 15A locking plug
- N07 : 125V 20A straight plug
- N08 : 250V 20A straight plug
- N09 : 277V 20A straight plug
- N10 : 125V 20A locking plug
- N11 : 250V 20A locking plug
- N12 : 277V 20A locking plug
- N13 : 347V 20A locking plug
- N14 : 480V 20A locking plug

HIGH TEMP APPLICATION

HT : High temp
(149F/65C) driver housing
component placement



Moves
driver
up for
greater
air flow

ADDITIONAL SURGE PROTECTION

SP2 : 20kV surge
protection

CONTROLS READY

EASILY ADD CONTROLS
ANY TIME WITHOUT THE
NEED FOR ANY WIRING



STANDALONE CONTROLS

Compatible with EiKO's Standalone Control Solutions. Microwave or PIR.



NETWORKED LIGHTING CONTROLS

Compatible with EiKO's Networked Lighting Controls System.




HBX3 Premium Round High Bay

HIGH PERFORMANCE. MORE VALUE.



Call your local
sales rep for
more details!

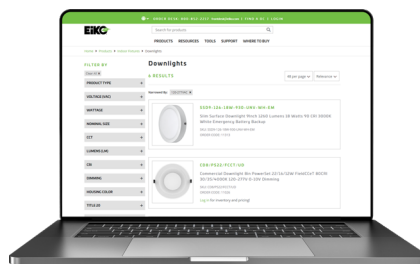

**PRICE & AVAILABILITY
ON OUR WEBSITE FOR OUR
AGENT AND DISTRIBUTOR
PARTNERS**



SCAN

World Headquarters, USA:
18000 W. 105th Street, 3rd Floor
Olathe, KS 66061
1.800.852.2217



Head Office, Canada:
7900 Goreway Drive, Unit 8
Brampton, ON L6T 5W6
1.888.741.2673