



# Introducing the **VL1** Volumetric Troffer



1X4



2X2



2X4

1x4 & 2x2 = 3080 to 4900 lm

2x4 = 3080 to 12,600 lm

Up to 140 lm/W

120-347V

White powder coated steel housing

IK07 Rated non-yellowing PMMA light  
diffusing acrylic lens

Controls Ready

Battery backup available  
(field or factory installed)

PowerSet & FieldCCeT

DLC Standard

Estimated L70: 100,000 Hours


## CONTROLS READY

EASILY ADD PUSH-IN  
STANDALONE OR NLC  
CONTROLS




## BATTERY BACKUP

8, 18W OR 40W FIELD OR  
FACTORY INSTALLED



## ACCESSORIES

SURFACE & RECESSED  
MOUNTING KITS  
AVAILABLE

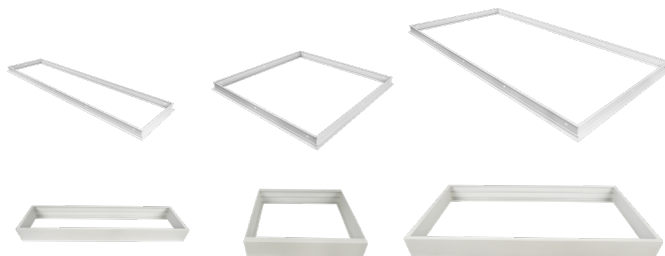

CONTACT US TODAY!



RoHS  
Compliant



CAN  
ICES-005

