



HIGHLIGHTS

Up to 130 lm/W

120-277V & 120-347V

Includes IK07 Rated non-yellowing PMMA light diffusing acrylic lens

White Housing

Powder coated, Steel housing

PowerSet & FieldCCeT

Controls Ready

DLC Premium

Estimated L70: 100,000 Hours

2', 4', 8'

Ships with V-hook and chain kit

CSX1

Commercial Strip

AVAILABLE MODELS

ORDER CODE	ITEM #	LENGTH	WATTS*	CCT**	LUMENS	EFFICACY (lm/W)	VOLTAGE	TRADITIONAL WATTAGE EQUIVALENT	DLC
									PREMIUM
13632	CSX1-2PS25-FCCT-H	2'	25/20/15W	3500/4000/5000K	3250/2600/1950 lm	130 lm/W	120-347VAC	2 lamp 17W T8	Pending
13780	CSX1-4PS45-40-H	4'	45/35/26W	4000K	5850/4550/3380 lm	130 lm/W	120-347VAC	2 lamp 32W T8	Pending
13628	CSX1-4PS45-40-U	4'	45/35/26W	4000K	5850/4550/3380 lm	130 lm/W	120-277VAC	2 lamp 32W T8	Pending
13629	CSX1-4PS45-50-U	4'	45/35/26W	5000K	5850/4550/3380 lm	130 lm/W	120-277VAC	2 lamp 32W T8	Pending
13634	CSX1-4PS45-FCCT-H	4'	45/35/26W	3500K / 4000K / 5000K	5850/4550/3380 lm	130 lm/W	120-347VAC	2 lamp 32W T8	Pending
13633	CSX1-4PS45-FCCT-U	4'	45/35/26W	3500K / 4000K / 5000K	5850/4550/3380 lm	130 lm/W	120-277VAC	2 lamp 32W T8	Pending
13636	CSX1-4PS65-FCCT-H	4'	65/60/55W	3500K / 4000K / 5000K	8450/7800/7150 lm	130 lm/W	120-347VAC	2 lamp 60W T8/4 lamp 32W T8	Pending
13635	CSX1-4PS65-FCCT-U	4'	65/60/55W	3500K / 4000K / 5000K	8450/7800/7150 lm	130 lm/W	120-277VAC	2 lamp 60W T8/4 lamp 32W T8	Pending
13782	CSX1-8PS90-40-H	8'	90/75/65W	4000K	11,700/9750/8450 lm	130 lm/W	120-347VAC	2 lamp 96W T8/4 lamp 60W T8	Pending
13630	CSX1-8PS90-40-U	8'	90/75/65W	4000K	11,700/9750/8450 lm	130 lm/W	120-277VAC	2 lamp 96W T8/4 lamp 60W T8	Pending
13631	CSX1-8PS90-50-U	8'	90/75/65W	5000K	11,700/9750/8450 lm	130 lm/W	120-277VAC	2 lamp 96W T8/4 lamp 60W T8	Pending
13638	CSX1-8PS90-FCCT-H	8'	90/75/65W	3500K / 4000K / 5000K	11,700/9750/8450 lm	130 lm/W	120-347VAC	2 lamp 96W T8/4 lamp 60W T8	Pending
13637	CSX1-8PS90-FCCT-U	8'	90/75/65W	3500K / 4000K / 5000K	11,700/9750/8450 lm	130 lm/W	120-277VAC	2 lamp 96W T8/4 lamp 60W T8	Pending

* All power-selectable fixtures ship at the highest wattage setting

** All CCT-selectable fixtures ship at 4000K

CONTROLS & SENSORS

ORDER CODE	ITEM #	DESCRIPTION	FACTORY INSTALLED CODE
STANDALONE CONTROLS			
PIR SENSORS			
13697	SENA-SHPR	Stand-alone PIR Motion Sensor, 12-24V, 1/2" Button Snap-in, 0-10V, Daylight Harvesting, 8-12ft, Parameters set by SEN5A-ACT.	M14
REMOTES FOR COMMISSIONING STANDALONE CONTROLS			
13344	SEN5A-ACT	Commissioning Tool for SEN5A, BAY-E-SEN/PIR, BAY-E-SEN/M, and MS2-DPX-3 (Backward compatible with SEN5A/CT and RC-100).	---

NETWORKED LIGHTING CONTROLS (NLC)

SENSOR AND CONTROLLER

13245	SENA-WHPA	BLE PIR Motion sensor, 12-24V, 1/2" Button Snap-in, 0-10V, Daylight Harvesting, 8-12ft, Parameters set by Silvair App	M21
-------	-----------	---	-----

WALL OR WIRELESS CONTROLLERS

12654	ESRPB-W-EO	BLE Easyfit by EnOcean wireless self-powered kinetic Single rocker pad, white, wall plate included. Fig 1	---
12655	EDRPB-W-EO	BLE Easyfit by EnOcean wireless self-powered kinetic Double rocker pad, white, wall plate included. Fig 2	---
12635	PSC-DM-WS-100-BLE-SR	BLE TruBlu 120-277V, Single Gang Single Button Wall Controller, White, Parameters set by Silvair App. Fig 3	---
12636	PSC-DM-I-WS-100-BLE-SR	BLE TruBlu PIR Occupancy/ Vacancy Sensor, 120-277V, Single Gang Wall Controller, White, Parameters set by Silvair App. Fig 4	---
12637	PSC-DM-WS-400-BLE-SR	BLE TruBlu 120-277V, Single Gang 4-Button Wall Controller, White, Parameters set by Silvair App. Fig 5	---


ADAPTERS & ACCESSORIES

12994	PSC-RET-100-BLE-SR	BLE TruBlu Range Extender, 120-277V, 800ft, Nema 4X Outdoor Enclosure. Fig 6	---
12993	PSC-TKP-200-BLE-SR	BLE TruBlu Battery Backup Timekeeper and Range Extender, 120V, 800ft, Nema 4X Outdoor Enclosure. Fig 7	---

CSX1

Commercial Strip

ACCESSORIES



CSX1-VCK



CSX1-AP



CSX1-AC

CUSTOM CORD LENGTH & CORD ENDS:

- N01** : 125V 15A straight plug
- N02** : 250V 15A straight plug
- N04** : 125V 15A locking plug
- N05** : 250V 15A locking plug
- N06** : 277V 15A locking plug
- N07** : 125V 20A straight plug
- N08** : 250V 20A straight plug
- N09** : 277V 20A straight plug
- N10** : 125V 20A locking plug
- N11** : 250V 20A locking plug
- N12** : 277V 20A locking plug
- N13** : 347V 20A locking plug

BATTERY BACKUPS

- EB08*** : 8W Internal Backup battery, 120-277V
- EB15*** : 15W Internal Backup battery, 120-277V
- EB20 ***: 20W Internal Backup battery, 120-277V

CONTROLS

- M14**: Stand-alone PIR Motion Sensor, 8-12ft
- M21**: Bluetooth NLC PIR Motion sensor, 8-12ft

* Battery is only compatible with 120-277V version

CONTROLS READY

EASILY ADD CONTROLS ANY TIME WITHOUT THE NEED FOR ANY WIRING



STANDALONE CONTROLS

Compatible with EiKO's Standalone Control Solutions.



NETWORKED LIGHTING CONTROLS

Compatible with EiKO's Networked Lighting Controls System.



RoHS Compliant



CAN ICES-005



STANDALONE CONTROLS

Coming Soon

SENA-SHPR


Stand-alone PIR Sensor - Snap-in

COMMISSIONING TOOL



SENA-ACT

Commissioning tool for standalone controls



NETWORKED LIGHTING CONTROLS



SENA-WHPA

BLE PIR Motion Sensor w/ fixture controller - Snap-in

COMMISSIONING APP (iOS)



FREE APP POWERED BY SIVAIR

iOS Device Sold Separately

OPTIONAL ACCESSORIES: WALL OR WIRELESS CONTROLLERS & RANGE EXTENDERS



FIG 1



FIG 2



FIG 3



FIG 4



FIG 5



FIG 6



FIG 7

CSX1

Commercial Strip




CSX1 Commercial Strip

HIGH PERFORMANCE. MORE VALUE.



Call your local
sales rep for
more details!

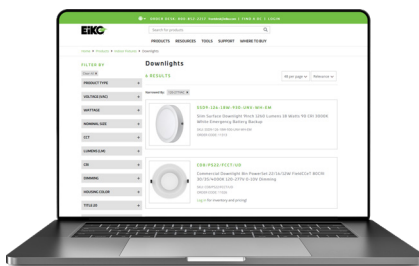

**PRICE & AVAILABILITY
ON OUR WEBSITE FOR OUR
AGENT AND DISTRIBUTOR
PARTNERS**



SCAN

World Headquarters, USA:
18000 W. 105th Street, 3rd Floor
Olathe, KS 66061
1.800.852.2217



Head Office, Canada:
7900 Goreway Drive, Unit 8
Brampton, ON L6T 5W6
1.888.741.2673