

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

VT2-L

2' LED VAPOUR TIGHT

ORDERING INFORMATION

Order code: VT2-LS1-W/40K
Model number: VT2-LS1-W/40K
UPC: 8740460018895
Case quantity: 1

PHYSICAL DATA

Dimensions: 26.75" x 6.75" x 3.75" (679 mm x 171 mm x 95 mm)
Lens material: PC
Latch material: Plastic
Housing material: White PC
Mounting: Stainless steel mounting hardware for wall, ceiling or suspended mountinG

PERFORMANCE DATA

Watts (W): 20
Volts (VAC): 120-277
Colour temperature (K)¹: 4 000
Lumen output (lm)²: 2 400
Efficiency (lm/W): 120
CRI: 80+
Life L70 (hrs)³: 180 500
Tested hours LM80 (hrs)³: 10 000
THD (%): 7
Power factor: 0.99
Dimming range: 0-10 V
Frequency (Hz): 60
Operating temp. range: -40 °C to 40 °C (-40 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

COMPATIBLE ACCESSORY

Part number	Type
HAR06-TPBIT-UDR	Tamper proof 2" Steel Power Bit



quick
ship



link
compatible



LED
fixture



wet
location




ICES
005



Intertek

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


DIMENSIONS

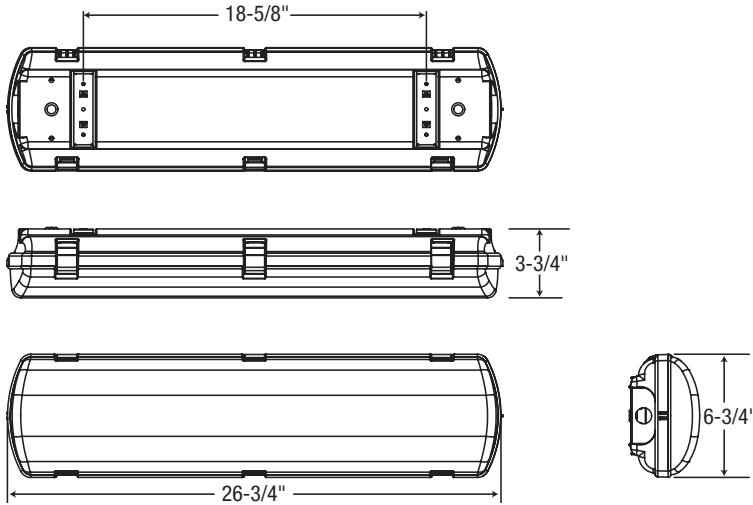

PHOTOMETRIC DATA¹

VT2-LS1-W/40K • 2 428.9 lm

Polar candela distribution

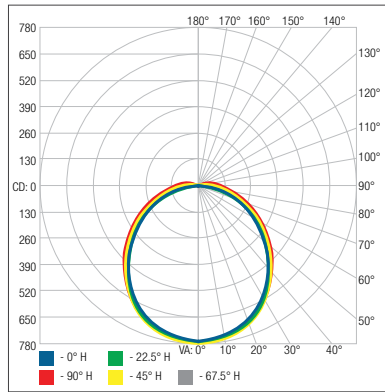

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	597.9	24.6%
0-40	974.1	40.1%
0-60	1 707.0	70.3%
60-90	587.4	24.2%
70-100	375.3	15.5%
90-120	121.9	5%
0-90	2 294.4	94.5%
90-180	134.5	5.5%
0-180	2 428.9	100%

Illuminance at a distance

	Center beam fc	Beam width
1.7'	266	4.5' 5.3'
3.3'	70.6	8.8' 10.3'
5.0'	30.8	13.4' 15.6'
6.7'	17.1	17.9' 20.9'
8.3'	11.2	22.2' 25.9'
10.0'	7.69	26.7' 31.2'

■ Vert. Spread: 106.4°
■ Horiz. Spread: 114.6°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.