

Technical Information Bulletin

LED Vapor Tight



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 66876
 Description: LSV/N/35W/50K/120-277/DD1/FP/A1/STD
 UPC: 69549668768
 Case quantity: 4



PHYSICAL DATA

Size in. (mm): 49 13/16" (1 265 mm)
 Lens material: Polycarbonate
 Frame Material: Polycarbonate
 Mounting: Pendant, suspended, surface
 Included: Fixtures come with stainless steel clips standard

PERFORMANCE DATA

Watts (W): 35
 Volts (VAC): 120-277
 Colour temp. (K): 5 000
 Lumen output (lm): 4 585
 Lumen per Watts (lm/W): 131
 CRI: 87
 Life L70 (h): 100 000
 THD (%): 120V = 10%
 277V = 10%
 Power factor: 0.9
 Frequency (Hz): 50/60
 Surge protection (kv): 2.5
 Input current (A): 0.45
 Output current (mA): 750
 Operating temp. range: -30 to 50 °C (-22 to 122 °F)



DIMMABLE



WET



RATING



WARRANTY



ICES
005



CERTIFIED

COMPATIBLE ACCESSORIES

Order code	Description
66878	LSV/N/LENS/FP/STD
67079	LVT4/ACC/STAINLESS STEEL CLIPS/STD

COMPATIBLE DIMMERS

Leviton	IPL710-DL
Lutron	NFTV, NTFTV

DESCRIPTION AND OTHER OPTIONS

LSV	/	N	/	40W	/	50K	/	120-277	/	DD1	/	FP	/	A1	/	STD
Family		Series		Watts		Colour temp. (K)		Volts (VAC)		Dimming		Lens type		Driver		Brand
LSV LED Surface Vapor Tight		N Narrow		35W 35 Watts 40W 40 Watts ¹ 52W 52 Watts ² 65W 65 Watts		40K 4 000 KELVIN 50K 5 000 KELVIN ³		120-277 347 120-277 V 347 V		DD1 0-10V dimming driver		FP Frosted Polycarbonate		A1 ESPEN		STD Standard

¹ Only available in 120-277 V

² 52 W only available in 4 000 K, 347 V

³ Not available in 35 & 52 W in 347 V

This lighting equipment complies with Canadian standard ICES-005 for use in commercial applications.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 May 22, 2019


Technical Information Bulletin

LED Vapor Tight


STANDARD®

ORDER CODE: 66876


TECHNICAL DRAWINGS AND DIMENSIONS

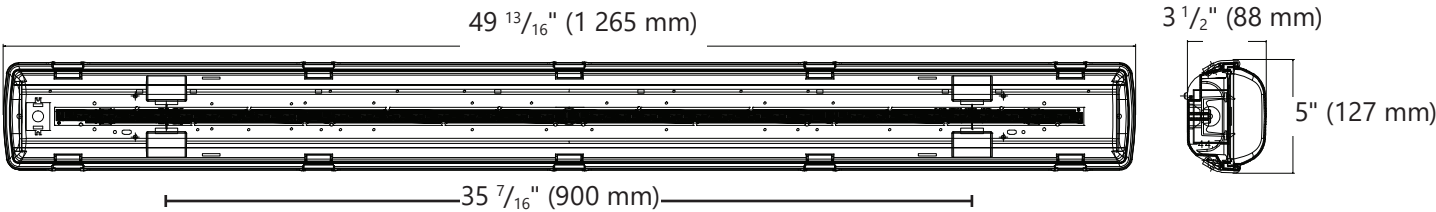

BEAM SPREAD*

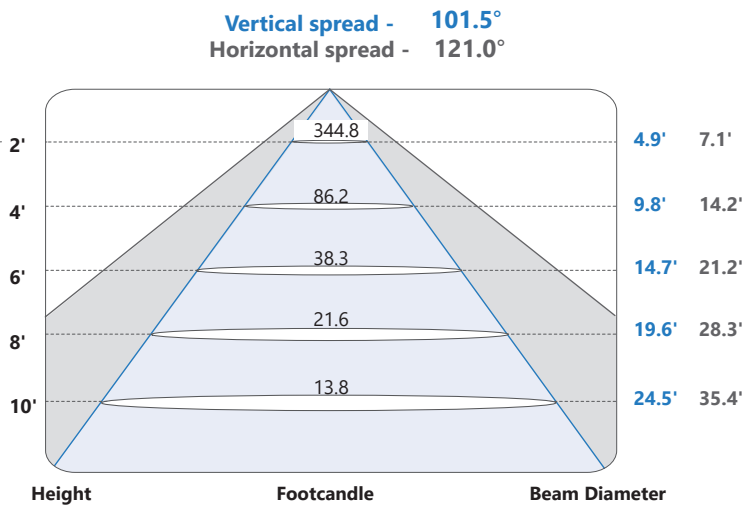

CANDELA DISTRIBUTION*

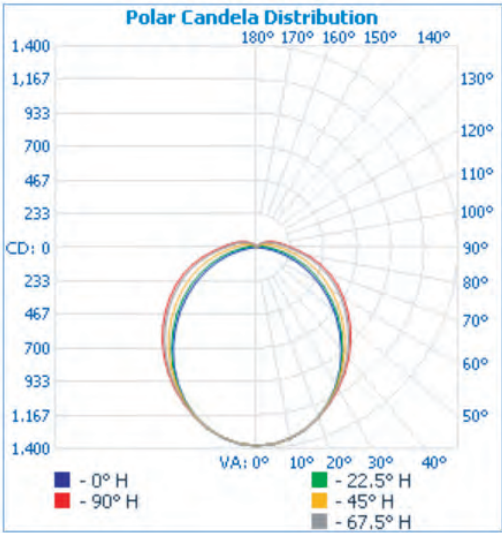

COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)*

RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	10	50	30	20	10	50	30	20	10	50	30	20	10
RCR: 0	1.17	1.17	1.17	1.17	1.14	1.14	1.14	.93	1.07	1.07	1.07	1.01	1.01	1.01	1.01	.96	.96	.96	.96	.93	.93	.93	.93	.93
1	1.06	1.00	.95	.91	1.02	.97	.93	.76	.92	.88	.85	.87	.84	.81	.82	.80	.77	.75	.74	.73	.72	.71	.70	.69
2	.96	.87	.79	.73	.92	.84	.78	.63	.80	.74	.69	.75	.71	.66	.71	.67	.64	.61	.60	.59	.58	.57	.56	.55
3	.87	.76	.67	.60	.84	.74	.66	.53	.70	.63	.58	.66	.60	.56	.63	.58	.54	.51	.50	.49	.48	.47	.46	.45
4	.80	.67	.58	.51	.77	.65	.57	.45	.62	.55	.49	.59	.52	.47	.56	.50	.46	.44	.43	.42	.41	.40	.39	.38
5	.73	.60	.51	.44	.70	.58	.50	.39	.55	.48	.42	.53	.46	.41	.50	.44	.40	.38	.37	.36	.35	.34	.33	.32
6	.67	.54	.45	.38	.65	.52	.44	.35	.50	.42	.37	.48	.41	.36	.45	.40	.35	.33	.32	.31	.30	.29	.28	.27
7	.63	.49	.40	.34	.60	.48	.39	.31	.45	.38	.33	.43	.37	.32	.41	.36	.31	.29	.28	.27	.26	.25	.24	.23
8	.58	.44	.36	.30	.56	.43	.35	.28	.42	.34	.29	.40	.33	.28	.38	.32	.28	.26	.25	.24	.23	.22	.21	.20
9	.54	.41	.33	.27	.53	.40	.32	.25	.38	.31	.26	.37	.30	.26	.35	.29	.25	.23	.22	.21	.20	.19	.18	.17
10	.51	.38	.30	.24	.49	.37	.29	.23	.35	.29	.24	.34	.28	.23	.33	.27	.23	.21	.20	.19	.18	.17	.16	.15

*Complete IES files available on our website

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____