

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

FLEXLED LED MODULE KIT

ORDERING INFORMATION

Order code: 66012
Model number: K/FLXLED/11.8W/30K/4TRM/SM/WH/REM0D/STD
UPC: 69549660120
Case quantity: 1

PHYSICAL DATA

Dimensions: 5" (127 mm)
Shape: Round
Finish: White

PERFORMANCE DATA

Watts (W): 11.8
Volts (VAC): 120
Colour temperature (K)¹: 3 000
Lumen output (lm)²: 750
Lumen per Watts (lm/W): 64
CRI: 90+
Life L70 (h)³: 50 000
Beam angle (°): 88
THD (%): <20
Power factor: >0.9
Dimmable: Yes
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



5 yrs
warranty

quick
ship

LED
fixture

dimmable
fixture

airtight

wet
location

IC
rated




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

PHOTOMETRIC DATA¹

66012 • K/FLXLED/11.8W/30K/4TRM/SM/WH/REM0D/STD • 799.6 lm

Polar candela distribution

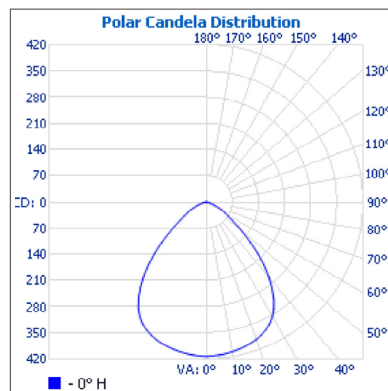

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	325.8	40.8%
0-40	520.8	65.1%
0-60	749.4	93.7%
60-90	50.2	6.3%
70-100	13.3	1.7%
90-120	0	0%
0-90	799.6	100%
90-180	0	0%
0-180	799.6	100%

Illuminance at a distance

	Center beam fc		Beam width
1.7'	143		3.3'
3.3'	37.9		6.4'
5.0'	16.5		9.7'
6.7'	9.20		13.0'
8.3'	6.00		16.1'
10.0'	4.13		19.4'
■ Vert. spread: 88.3°			

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.