

# Technical Information Bulletin - LED

# E-Lume™

Date: \_\_\_\_\_  
In hands date of project: \_\_\_\_\_  
Project name/Number: \_\_\_\_\_  
Name of distributor: \_\_\_\_\_  
Client #: \_\_\_\_\_  
Name of end user: \_\_\_\_\_

## ORDERING INFORMATION

Order code: 64635  
Description: LED/GU10/7W/30K/25/GRY/ELUME  
UPC: 69549646353  
Case quantity: 48

## PERFORMANCE DATA

Shape: MR16  
Base: GU10  
Wattage (W): 7  
Lamp voltage (VAC): 120  
Colour temperature (K)\*\*: 3 000  
Average life (L70 hours): 25 000  
Initial lumens (lm)\*: 563  
Initial lumens per watt (lm/W): 80  
CRI: 84  
Beam angle: 25  
Power factor: 0.99  
Operating temperature range: - 20 °C / -4 °F to 45 °C / 113 °F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %



## CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit [www.standardpro.com](http://www.standardpro.com).
- Not recommended for use with timers.
- Operating temperature: - 20 °C / - 4 °F to 45 °C / 113 °F.
- 3 Years Limited Warranty.

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the lamp configuration mentioned above.


Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

June 6, 2016

**STANDARD**®

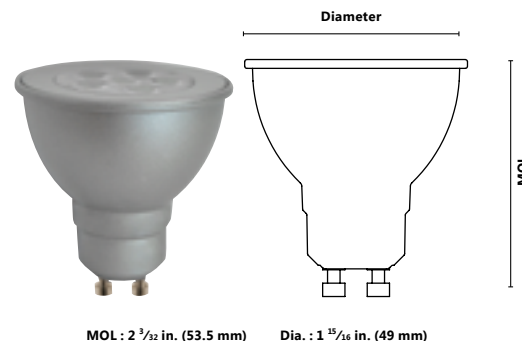

## DIMMER COMPATIBILITY LIST

|         |                      |
|---------|----------------------|
| Legrand | HCL453P              |
| Cooper  | AAL06, SLC03P        |
| Leviton | 6674, IPL06          |
| Lutron  | CTCL-153P, DVCL-153P |