

Technical Information Bulletin

DESIGN LED Lamps




Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67612
Description: P30L/13W/40K/45/DESIGN/STD
UPC: 69549676121
Case quantity: 1/20

PHYSICAL DATA

Type: PAR30LN
Base: E26
Material: Glass
Lens type: Clear

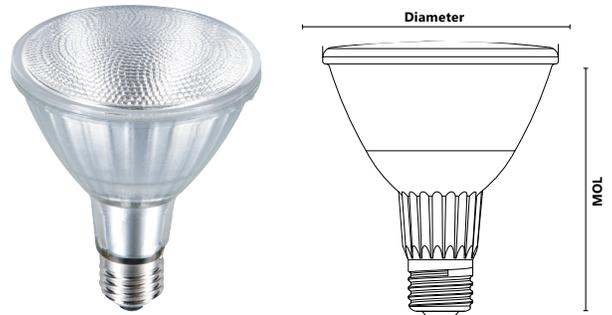

MOL: 4 21/32" (118 mm) Dia.: 3 3/4" (95 mm)

PERFORMANCE DATA

Watts (W): 13
Lamp volts (VAC): 120
Colour temperature (K)¹: 4 000
Life L70 (hrs): 25 000
Lumens (lm)²: 950
Lumens per watt (lm/W): 73
Traditional equivalent (W): 75
CRI: 80
Beam angle (°): 45
CBCP (cd): 1 100
THD (%): 30
Frequency (Hz) 60
Power factor: 0.92
Operating temperature range: -20°C to 45°C (-4°F to 113°F)

¹ Typical colour temperature range: +/- 5 %
² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

COMPATIBLE DIMMERS

Legrand	RH703PTUTC
Leviton	6615, IPL06*, 6674*, DSL06-1LZ*, IPE04-1LZ
Lutron	PD-5NE, RRD-6NA, DVRP-253P, SELV-300P

* Low noise might occur within the dimming range



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____ Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.