

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

## ORDERING INFORMATION


Order code: 63446  
 Description: LED/G9/3.5W/40K/STD  
 UPC: 069549634466  
 Case quantity: 500

## PERFORMANCE DATA

Shape: JD  
 Wattage (W): 3.5  
 Base: G9  
 Lamp voltage (VAC): 120  
 Colour temperature (K)\*\*: 4 000  
 Life L70 (hrs): 30 000  
 Initial lumens (lm)\*: 245  
 Initial lumens per watt (lm/W): 86  
 CBCP: -  
 CRI: 80  
 Beam angle: 300  
 Power factor:  $\geq 0.9$   
 Operating temperature range: -20 °C/-4 °F to 40 °C/104 °F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %

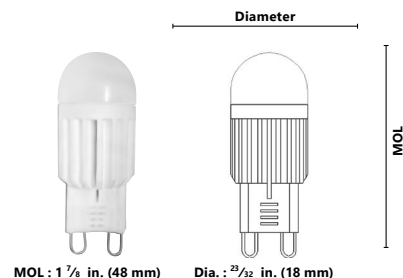

## DIMMER COMPATIBILITY LIST

Legrand:	PD-5NE
Cooper:	RRD-6NA-WH
Leviton:	IPE04-1LZ
Lutron:	DVRP-253-WH, SELV-300P

## CAUTIONS

- Risk of electric shock, for use in dry locations only.
- Suitable for use in open luminaires.
- For complete COMPATIBLE DIMMERS and warranty information visit [www.standardpro.com](http://www.standardpro.com)
- Operating temperature: -25 °C/-13 °F to 40 °C/104 °F

NOTES: This device complies with Part 15 of the FCC rules and has been tested and found to comply with the limits for a Class B digital device. This product may cause interference with other devices. If interference occurs, change the location of the product. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment. This RFLD device complies with Canadian ICES-003. LED lamps must be stored, operated under suitable environmental conditions and in accordance with, but not limited to, the latest National Electrical Code, cETLus, cULus, CSA and ANSI specifications.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 6, 2020

**STANDARD**