

# Technical Information Bulletin

## LED Lamps



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_


### ORDERING INFORMATION

Order code: 66765  
 Description: C12/S2/4.5W/27K/E12/FR/STD  
 UPC: 69549667655  
 Case quantity: 24 / 48

### PERFORMANCE DATA

Shape: C12  
 Base: E12  
 Watts(W): 4.5  
 Volts (VAC): 120  
 Colour temperature (K)\*\*: 2 700  
 Life L70 (hrs): 15 000  
 Initial lumens (lm)\*: 331  
 Initial lumens per watt (lm/W): 73  
 CRI: 82  
 Beam angle: 180  
 Power factor: 0.98  
 Operating temperature range: -20 °C to 45 °C (-4 °F to 113 °F)

\*Initial lumens range: +/- 10 %      \*\*Typical colour temperature range: +/- 5 %

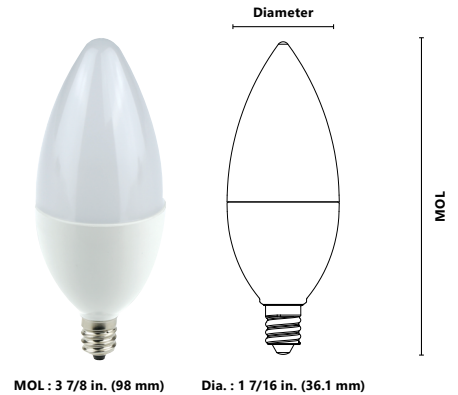

### COMPATIBLE DIMMERS

Legrand	RH703PTUTC
Cooper	DAL06P, SLC03P
Leviton	6674, DSL06-1LZ, IPL06
Lutron	AYCL-253P, CTCL-153P, DVCL-253P, DVELV-300P, MACL-153P



### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electric shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Added weight of the device may cause instability of a free-standing portable luminaire. Use only with a portable table lamps in which the distance from the bottom of the base to the top of the lamp holder does not exceed three (3) times the minimum base diameter.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60 Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- For complete dimmer and warranty information visit [www.standardpro.com](http://www.standardpro.com).
- 3 Years Limited Warranty.
- Operating temperature : - 20°C to 45°C (-4°F to 113°F)

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.