

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

ORDERING INFORMATION

Order code: 65614
 Description: LED/A19/S2/12W/30K/3WAY/STD
 UPC: 69549656147
 Case quantity: 48

PERFORMANCE DATA

Shape: A19
 Base: E26
 Wattage (W): 3 / 9 / 12
 Lamp voltage (VAC): 120
 Colour temperature (K)**: 3 000
 Average life (L70 hours): 25 000
 Initial lumens (lm)*: 280 / 950 / 1 200
 Initial lumens per watt (lm/W): 93 / 106 / 100
 CRI: 83
 Beam angle: 220
 Power factor: 0.97
 Operating temperature range: - 20 °C / - 4 °F to 45 °C / 113 °F

*Initial lumens range: +/- 10 %

**Typical colour temperature range: +/- 5 %



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Added weight of the device may cause instability of a freestanding portable luminaire.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Not for use with dimmers.
- For complete warranty information visit www.standardpro.com.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.


Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March, 2017

STANDARD[®]

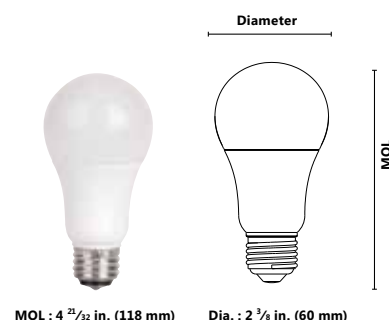

MOL : 4 23/32 in. (118 mm) Dia. : 2 3/8 in. (60 mm)