

Technical Information Bulletin

Design LED Filament Lamps




Date: _____ Name of distributor: _____
In hands date of project: _____ Client #: _____
Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67662
Description: G25/S3/4.5W/27K/SW/FIL/STD
UPC: 69549676626
Case quantity: 10 / 40

PHYSICAL DATA

Shape: G25
Base: E26
Finish: Soft White

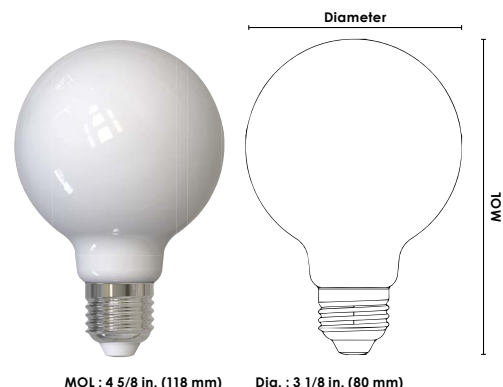

PERFORMANCE DATA

Watts (W): 4.5
Volts (VAC): 120
Colour temp. (K)¹: 2 700
Lumen output (lm)²: 380
Lumen per Watts (lm/W): 84
Traditional equivalent (W): 40
CRI: 80
Life L70 (h): 15 000
Beam angle (°): 360
Power factor: 0.9
Frequency (Hz): 60
Dimming: Forward and reverse
Burning position: Universal
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %
² Initial lumens range: +/- 5 %

COMPATIBLE DIMMERS

BRAND	MODEL
LEGRAND	RH703PTUTC
COOPER	RRD-6NA, SLC03P
LEVITON	6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
LUTRON	AYCL-253P, CTCL-153P, DVCL-253P, DVRP-253P, MACL-153P, PD-5NE, SELV-300P



DIMMABLE



DAMP



ENCLOSED
FIXTURE



2 YEARS
WARRANTY



ICES
005



c UL US

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
Company: _____
Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

May 17, 2019