

## Individual Spec Sheet

# LOW VOLTAGE LED PUCK LIGHTS

## LED UNDERCABINET LUMINAIRE

### 12 V

### ORDERING INFORMATION

**Order code:** 67171  
**Model number:** UCP/KIT3/12V/2.2W/40K/FR/WH/STD  
**UPC:** 069549671713  
**Case quantity:** 30

### PHYSICAL DATA

**Type:** LED Puck Light - kit of 3 units  
**Size in. (mm):** 3 (75.4)  
**Shape:** Round  
**Finish:** White  
**Lens finish:** Frosted  
**Mounting:** Surface and Recessed  
**Wire Length in (mm):** 39 3/4 (1 010)  
**Wire gauge (AWG):** 22  
**Daisy chain installation:** Up to 15 pucks can be connected with a maximum of 5 pucks per HUB entry (see Installation Instructions for more details)

### PERFORMANCE DATA

**Watts (W):** 2.2  
**Volts (V DC):** 12  
**Color temp. (K):** 4 000  
**Lumen output (lm):** 150  
**Lumen per Watts (lm/W):** 68  
**CRI:** 90  
**Life L70 (h):** 50 000  
**Beam angle (°):** 120  
**Operating temp. range:** -20°C to 40°C (-4°F to 104°F)

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### INCLUDED IN THE BOX (KITS OF 3 UNITS)



3 x LED pucks in the chosen finish



1 x HUB with 6 entries for pucks



1 x plug-in driver

### COMPATIBLE DRIVERS

Order code	Description
67184 <sup>1</sup>	LED/DRIVER/12W/12V/PLUG/ND/STD
62265 <sup>2,3</sup>	LED/TAPE/36W/12V/WW+CW/PS/ND/STD
65743 <sup>2,3</sup>	LED/DRIVER/10W/12V/HW/ND/STD
65744	LED/DRIVER/20W/12V/HW/ND/STD

<sup>1</sup> Included in the kits of 3 units.

<sup>2</sup> Ensure hardwire connections are made in a junction box (junction box not included with driver).

<sup>3</sup> A wire to DC male connector (66241) is needed to allow hub connection to hardwire driver.



**3 yrs**  
warranty

**quick ship**

**LED fixture**

**dimmmable**

**damp location**

**ICES 005**




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


## ACCESSORIES (TO ORDER SEPARATELY)

Order code	Description	Type	Figure	Case qty (inner/master)
67180	UCP/TRIM/BACKPLATE/WH/STD	White Trim and Backplate	A	50 / 200
67181	UCP/TRIM/BACKPLATE/BLK/STD	Black Trim and Backplate	B	50 / 200
67182	UCP/TRIM/BACKPLATE/BN/STD	Brushed nickel Trim and Backplate	C	50 / 200
67183 <sup>1</sup>	UCP/ACC/HUB6/STD	HUB with 6 entries	D	30 / 120
67184	LED/DRIVER/12W/12V/PLUG/ND/STD	Plug-in driver	E	- / 80
67185	UCP/ACC/DIMMER/STD	ON/OFF and dimming switch	F	30 / 120
67186	UCP/ACC/MOTIONSENSOR/STD	Motion sensor and dimming switch	G	30 / 120

<sup>1</sup> Included in the kits of 3 units.

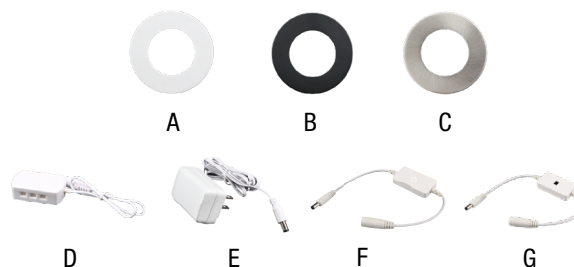


## DIMENSIONS

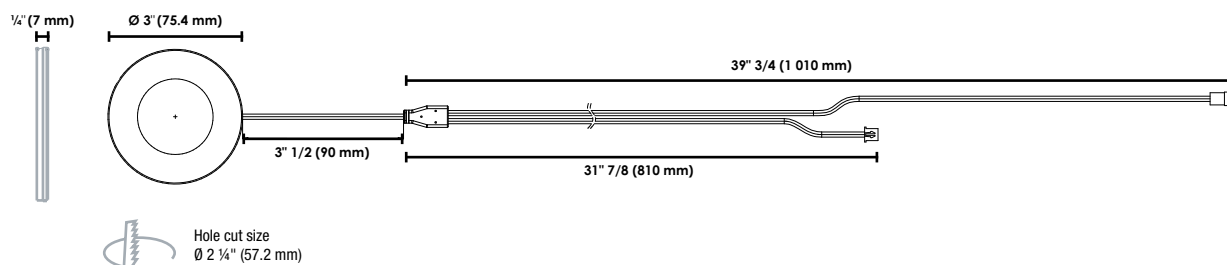

## PHOTOMETRIC DATA<sup>1</sup>

67171 • UCP/KIT3/12V/2.2W/40K/FR/WH/STD • 2.2 W • 4 000 K • 122.9 lm

### Polar candela distribution

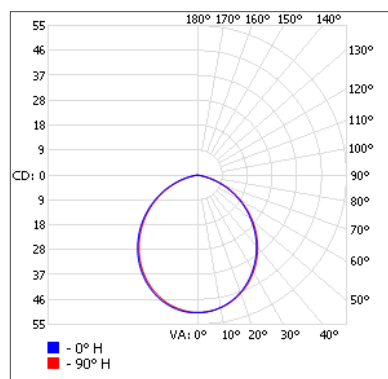

### Zonal lumen summary

Zone	Lumens	% Fixture
0-30	38.5	31.3%
0-40	62.0	50.4%
0-60	104.8	85.3%
60-90	18.1	14.7%
70-100	5.0	4.1%
90-120	0	0%
0-90	122.9	100%
90-180	0	0%
0-180	122.9	100%

### Illuminance at a distance

Center beam fc	Beam width
1.7'	4.2' 4.2'
3.3'	8.1' 8.1'
5.0'	12.3' 12.3'
6.7'	16.5' 16.5'
8.3'	20.5' 20.4'
10.0'	24.7' 24.6'

Vert. spread: 101.9°  
Horiz. spread: 101.8°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.