

Individual Spec Sheet

LOW VOLTAGE LED PUCK LIGHTS

LED UNDERCABINET LUMINAIRE

12 V

ORDERING INFORMATION

Order code: 67173
Model number: UCP/KIT3/12V/2.2W/30K/FR/BLK/STD
UPC: 069549671737
Case quantity: 30

PHYSICAL DATA

Type: LED Puck Light - kit of 3 units
Size in. (mm): 3 (75.4)
Shape: Round
Finish: Black
Lens finish: Frosted
Mounting: Surface and Recessed
Wire Length in (mm): 39 3/4 (1 010)
Wire gauge (AWG): 22
Daisy chain installation: Up to 15 pucks can be connected with a maximum of 5 pucks per HUB entry (see Installation Instructions for more details)

PERFORMANCE DATA

Watts (W): 2.2
Volts (V DC): 12
Color temp. (K): 3 000
Lumen output (lm): 150
Lumen per Watts (lm/W): 68
CRI: 90
Life L70 (h): 50 000
Beam angle (°): 120
Operating temp. range: -20°C to 40°C (-4°F to 104°F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

INCLUDED IN THE BOX (KITS OF 3 UNITS)



3 x LED pucks in the chosen finish



1 x HUB with 6 entries for pucks



1 x plug-in driver

COMPATIBLE DRIVERS

Order code	Description
67184 ¹	LED/DRIVER/12W/12V/PLUG/ND/STD
62265 ^{2,3}	LED/TAPE/36W/12V/WW+CW/PS/ND/STD
65743 ^{2,3}	LED/DRIVER/10W/12V/HW/ND/STD
65744	LED/DRIVER/20W/12V/HW/ND/STD

¹ Included in the kits of 3 units.

² Ensure hardwire connections are made in a junction box (junction box not included with driver).

³ A wire to DC male connector (66241) is needed to allow hub connection to hardwire driver.



3 yrs
warranty

quick ship

LED fixture

dimmmable

damp location

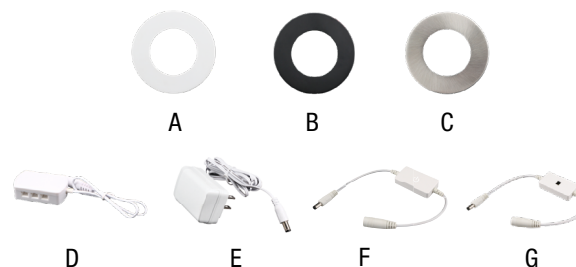
ICES 005



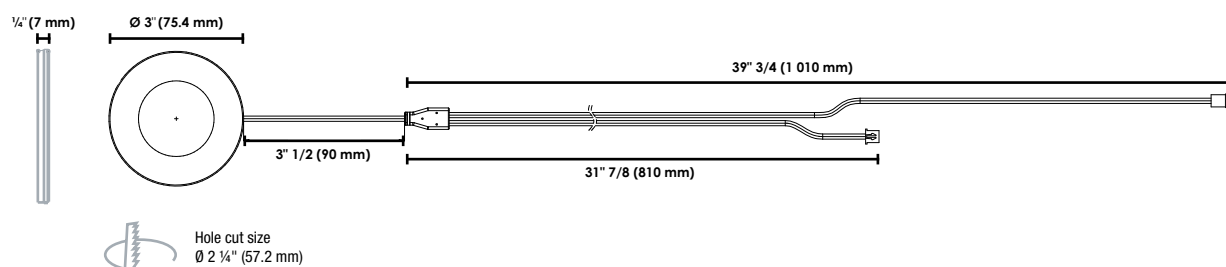
This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ACCESSORIES (TO ORDER SEPARATELY)

Order code	Description	Type	Figure	Case qty (inner/master)
67180	UCP/TRIM/BACKPLATE/WH/STD	White Trim and Backplate	A	50 / 200
67181	UCP/TRIM/BACKPLATE/BLK/STD	Black Trim and Backplate	B	50 / 200
67182	UCP/TRIM/BACKPLATE/BN/STD	Brushed nickel Trim and Backplate	C	50 / 200
67183 ¹	UCP/ACC/HUB6/STD	HUB with 6 entries	D	30 / 120
67184	LED/DRIVER/12W/12V/PLUG/ND/STD	Plug-in driver	E	- / 80
67185	UCP/ACC/DIMMER/STD	ON/OFF and dimming switch	F	30 / 120
67186	UCP/ACC/MOTIONSENSOR/STD	Motion sensor and dimming switch	G	30 / 120

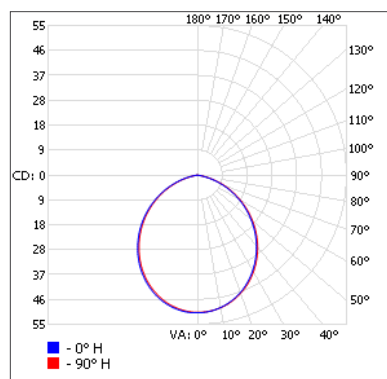
¹ Included in the kits of 3 units.

DIMENSIONS

PHOTOMETRIC DATA¹

67173 • UCP/KIT3/12V/2.2W/30K/FR/BLK/STD • 2.2 W • 3 000 K • 122.9 lm

Polar candela distribution



Zonal lumen summary

Zone	Lumens	% Fixture
0-30	38.5	31.3%
0-40	62.0	50.4%
0-60	104.8	85.3%
60-90	18.1	14.7%
70-100	5.0	4.1%
90-120	0	0%
0-90	122.9	100%
90-180	0	0%
0-180	122.9	100%

Illuminance at a distance

Center beam fc	Beam width
1.7'	4.2' 4.2'
3.3'	8.1' 8.1'
5.0'	12.3' 12.3'
6.7'	16.5' 16.5'
8.3'	20.5' 20.4'
10.0'	24.7' 24.6'

Vert. spread: 101.9°
 Horiz. spread: 101.8°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.