

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_

Date: \_\_\_\_\_

## Individual Spec Sheet

# LOW VOLTAGE LED TAPE

4.4 W, 24 V - IP22

### ORDERING INFORMATION

Order code:	65890
Description:	TAPE/16.4'/4.4W/40K/24V/IP22/180/8MM/STD
UPC:	069549658905
Case quantity:	25

### PHYSICAL DATA

Reel Total Length:	16.4 ft. (5 m)
Jacketed or Unjacketed:	Unjacketed
Wire gauge:	22 AWG
Number of LEDs:	180 LEDs per meter 55 LEDs per foot
Cutable length:	1 <sup>5</sup> / <sub>16</sub> in (33.3 mm) or every 6 LED chips
Maximum run length:	23 ft. (7 m)
Operating Temperature:	-25°C / -13°F to 40°C / 104°F

### PERFORMANCE DATA

Volts (V DC):	24
Color temperature (K):	4 000 (Cool white)
Watts per length:	73 W per reel 14.5 W per meter 0.37 W per inch
Light output per length:	5 150 lm per reel 1 030 lm per meter 26 lm per inch
Efficacy (lm/W):	71
CRI:	90+
Life (hrs):	50 000
Beam angle (°):	120

<sup>1</sup> Typical Color temperature range: +/- 5 %<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 5 %<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

Extrusions, drivers and accessories are available (sold seperatly).  
Custom lenghts available upon request. Ask your sales representative for more information.  
This LED Tape is also available in 1.5 W and 2.9 W.




**3**<sup>yrs</sup>  
warranty

  
dimmable  
fixture

  
dry  
location



DIMENSIONS

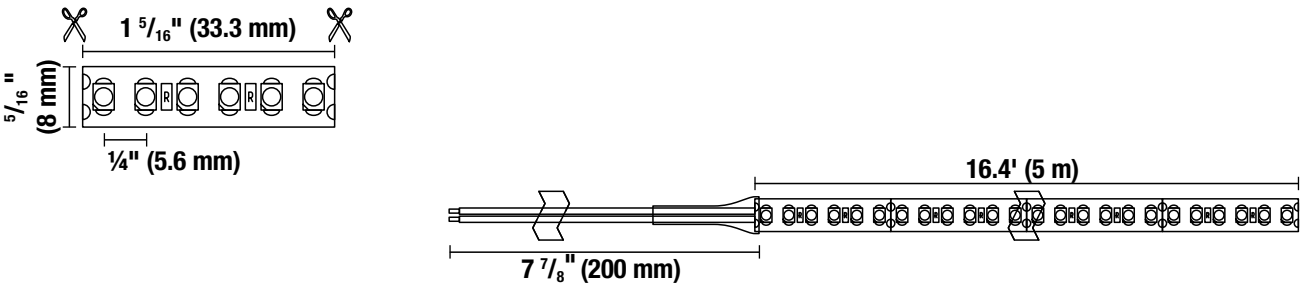

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.