

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LINE VOLTAGE TAPES

## DRIVERLESS 120V

## LED Strips and Accessories

### ORDERING INFORMATION

**Order code:** 67635  
**Model number:** TAPE/32.8'/4W/30K/120V/IP65/72/16MM/STD  
**UPC:** 69549676350  
**Case quantity:** 1 tape reel

### FEATURES AND SPECIFICATIONS

**Reel Total Length:** 32.8' (10m)  
**Jacketed or Unjacketed:** Jacketed with PVC coating  
**Wire gauge:** 18 AWG  
**Number of LEDs:** 18 LED/ft, 72 LED/m, 2 160 LED/reel  
**Cuttable length:** 12" (305 mm) or every 21 LED chips  
**Maximum run length:** 164' (50m)

### PERFORMANCE DATA

**Watts (W):** 132 W per reel / 13.2 W per meter / 0.34 W per inch  
**Volts (VAC):** 120  
**Colour temperature (K):** 3 000  
**Lumen output (lm):** 11 480 lm per reel / 1 148 lm per meter / 29 lm per inch  
**Lumen per Watts (lm/W):** 87  
**CRI:** 90+  
**Life L70 (h):** 50 000  
**Beam angle (°):** 120  
**Environment:** Wet  
**IP rating:** IP65  
**Operating temp. range:** -20°C to 40°C (-4°F to 104°F)

<sup>1</sup> Typical colour temperature range: +/- 5 %

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

### COMPATIBLE ACCESSORIES<sup>1</sup>

| Order code         | Model number                     | Type                                     |
|--------------------|----------------------------------|------------------------------------------|
| 67641              | TAPE/HARDWIREKIT/120V/STD        | Hardwire Kit                             |
| 67642              | TAPE/PLUG/120V/STD               | 120 V Power Cord                         |
| 67645 <sup>2</sup> | TAPE/BACKETS/120V/STD 10P        | Fixing Clips                             |
| 67643              | TAPE/ELECTBOXCOVER/RECT/120V/STD | Electrical box cover plate - Rectangular |
| 67644              | TAPE/ELECTBOXCOVER/RND/120V/STD  | Electrical box cover plate - Round       |
| 67904              | TAPE/6IN/JUMPER/120V/STD         | 6" Jumper                                |
| 67905              | TAPE/12IN/JUMPER/120V/STD        | 12" Jumper                               |
| 69020              | TAPE/HARDWARE/120V/ENDCAPS       | End Cap                                  |

<sup>1</sup> All accessories sold separately.

<sup>2</sup> It is recommended to put a fixing clip every 6 inches to ensure secure installation.

### COMPATIBLE DIMMERS

| Brand   | Model                         |
|---------|-------------------------------|
| LEGRAND | RH703PTUTC                    |
| LEVITON | DDMX1                         |
| LUTRON  | DVRP-253P, RRD-6NA, SELV-300P |

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



**3** yrs  
warranty

  
dimmable  
fixture

  
wet  
location

  
IP  
65


  
ICES  
005

  
ETL  
Intertek


  
FCC

## SECTIONS CONNECTED WITH JUMPERS

In order to make electrical connections, the last segment of the cut section must be cut at 8" (4" shorter) at the output pins.  
(see diagram below)

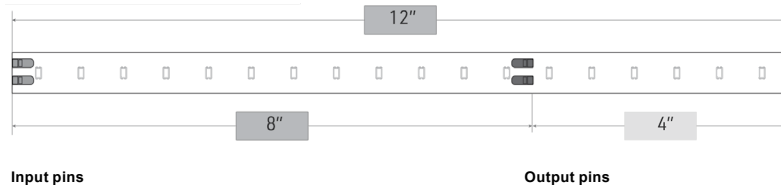

## DIMENSIONS

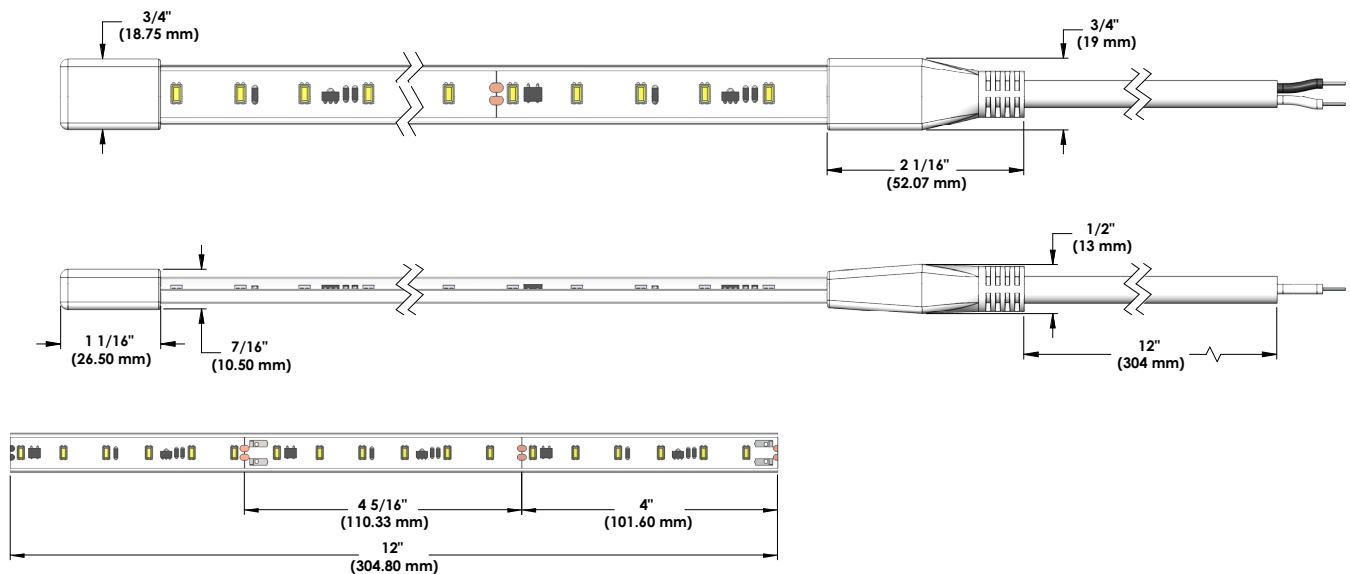

## ADDITIONAL INFORMATION

- 120 VAC input only.
- Do not exceed the maximum number of extensions or flexible light lengths of 164' permitted by the manufacturer.
- Secure this flexible light using only the clips offered in this line. Do not secure this product or its cord with staples, nails, or like means that may damage the insulation or permanently attach to the building structure.
- Do not subject flexible lighting to continuous flexing.
- PVC coating on LED tape is not suitable for direct sunlight exposure.

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.