

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

12 V DC LED DRIVER

PLUG-IN NON-DIMMABLE

Class 2

ORDERING INFORMATION

Order code: 62266
Model number: LED/TAPE/36W/12V/RGB/PS/ND/STD
UPC: 69549622661
Case quantity: 50

PHYSICAL DATA

Dimensions: Cord length: 6.56 ft (2 m)
Type: Plug-in Non-Dimmable
Color: White

PERFORMANCE DATA

Output Power (W): 36
Input Voltage (V AC): 100 - 240
Output Voltage (V DC): 12
Environment: Dry
Dimmable: No
Power factor: >0.8
Frequency (Hz): 50/60
Operating temp. range: 0 °C to 40 °C (32 °F to 104 °F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

Included in the box

RGB remote control (for RGB kit only)
RGB Controller
LED Driver
Connector

COMPATIBLE PRODUCTS

Order code	Description	Type
61953	LED/TAPE/16.4'/5050/RGB KIT/12V/50M/STD	RGB TAPE KIT



1 yr
warranty

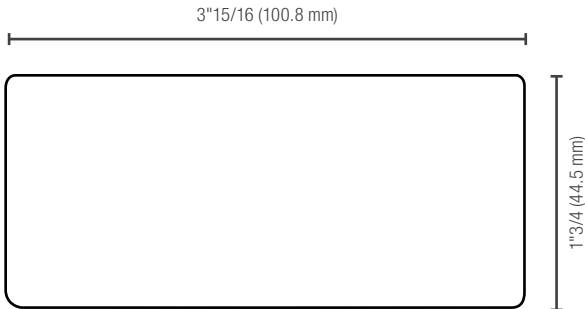

dry
location



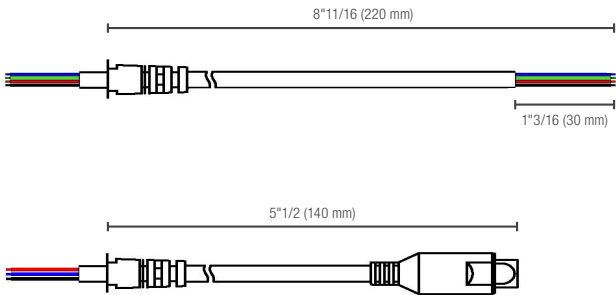
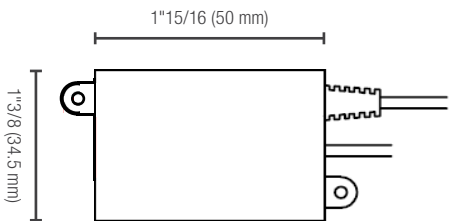
This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

RGB LED Driver



Controller



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.