

Technical Information Bulletin

Fluorescent



ORDERING INFORMATION

Order code: 65847
Description: F32T8/BLB/RS/G13/STD
UPC: 69549658479
Case quantity: 24




Nominal length : 48 in. (1 213 mm) Dia. : 1 in. (26 mm)


PERFORMANCE DATA

Shape:	T8
Base:	G13 (Med Bipin)
Starting method:	Rapid Start (RS)
Wattage (W):	32
Colour temperature (K):	N/A
CRI:	N/A
Rated life on IS ¹ ballast:	
Based on a 3 hour start	15 000
Based on a 12 hour start	15 000
Rated life on PS/PRS ¹ ballast:	
Based on a 3 hour start	15 000
Based on a 12 hour start	15 000
Initial lumens (lm):	N/A
Mean lumens (lm):	N/A
Nominal efficiency (lm/W):	N/A
TCLP compliant:	No
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

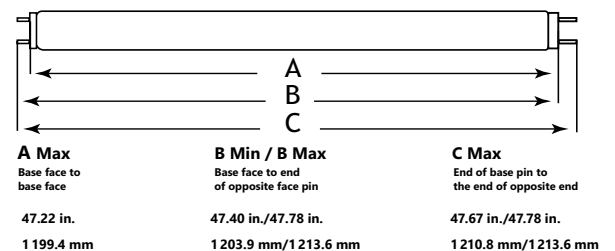

SPECTRAL DISTRIBUTION

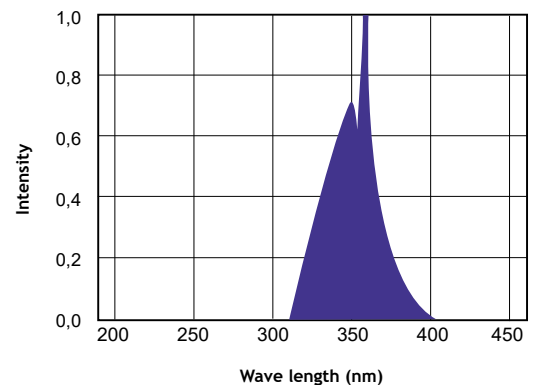

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 Coloured ballast.