

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

FLEXLED LED MODULE KIT

ORDERING INFORMATION

Order code: 66013
Model number: K/FLXLED/11.8W/30K/4TRM/BAF/WH/REMOD/STD
UPC: 69549660137
Case quantity: 1

PHYSICAL DATA

Dimensions: 5" (127mm)
Shape: Round
Finish: White

PERFORMANCE DATA

Watts (W): 11.8
Volts (VAC): 120
Colour temperature (K): 3 000
Lumen output (lm): 750
Lumen per Watts (lm/W): 64
CRI: 90+
Life L70 (h): 50 000
Beam angle (°): 88
THD (%): <20
Power factor: >0.9
Dimmable: Yes
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



5
yrs
warranty



quick
ship



LED
fixture



dimmable
fixture



airtight



wet
location



IC
rated



This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
Data is based upon tests performed in a controlled environment.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


DIMENSIONS



PHOTOMETRIC DATA¹

66013 • K/FLXLED/11.8W/30K/4TRM/BAF/WH/REM0D/STD • 795.3 lm

Polar candela distribution

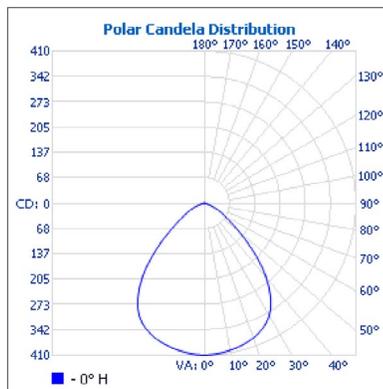

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	322.3	40.5%
0-40	515.9	64.9%
0-60	743.9	93.5%
60-90	51.4	6.5%
70-100	14.1	1.8%
90-120	0	0%
0-90	795.3	100%
90-180	0	0%
0-180	795.3	100%

Illuminance at a distance

Center beam fc	Beam width
1.7'	3.3'
3.3'	6.4'
5.0'	9.7'
6.7'	13.0'
8.3'	16.1'
10.0'	19.5'

■ Vert. spread: 88.4°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.