


ORDERING INFORMATION

Order code: 60076
Description: E232T8IS347/H/90C
UPC: 69549600768

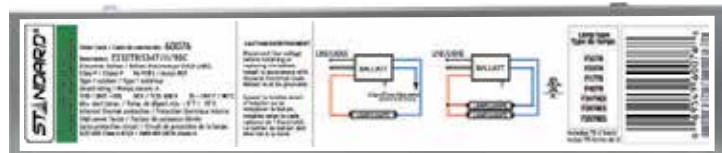

SPECIFICATIONS

Ballast type: Electronic
Starting method: Instant Start
Lamp connection: Parallel
Input voltage (V): 347 V
Input frequency (Hz): 50/60HZ
Max. case temperature: 90 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 600
Inherent thermal protection: Yes
Lamp protection circuit: Yes
ICES-005 Compliant: Class A RFLD
Auto-restrike: Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
347 VOLTS										
F32T8 (32W)	2	32	0/-18	0.21	74	1.20	10	0.99	1.7	1.62
F32T8/ES (30W)	2	30	32/0	0.21	71	1.20	10	0.99	1.7	1.69
F32T8/ES (28W)	2	28	32/0	0.20	68	1.20	10	0.99	1.7	1.76
F32T8/ES (25W)	2	25	32/0	0.19	65	1.20	10	0.99	1.7	1.85
F25T8 (25W)	2	25	0/-18	0.18	62	1.23	10	0.99	1.7	1.98
F17T8 (17W)	2	17	0/-18	0.11	40	1.23	15	0.98	1.7	3.08
LED22T8 (22W)	2	22	0/-18	0.19	64	-	10	0.99	-	-
LED18T8 (18W)	2	18	0/-18	0.14	48	-	10	0.98	-	-
F32T8 (32W)	1	32	0/-18	0.15	50	1.43	15	0.98	1.7	2.86
F32T8/ES (30W)	1	30	32/0	0.14	47	1.43	15	0.98	1.7	3.04
F32T8/ES (28W)	1	28	32/0	0.13	45	1.41	15	0.99	1.7	3.13
F32T8/ES (25W)	1	25	32/0	0.12	43	1.41	15	0.99	1.7	3.28
F25T8 (25W)	1	25	0/-18	0.11	39	1.45	15	0.98	1.7	3.72
F40T8 (40W)	1	40	32/0	0.17	60	1.39	15	0.99	1.7	2.32
LED22T8 (22W)	1	22	0/-18	0.12	41	-	10	0.97	-	-
LED18T8 (18W)	1	18	0/-18	0.10	31	-	10	0.92	-	-

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:



Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015

ORDERING INFORMATION

Order code: 60076
Description: E232T8IS347/H/90C
UPC: 69549600768

WIRING DIAGRAM

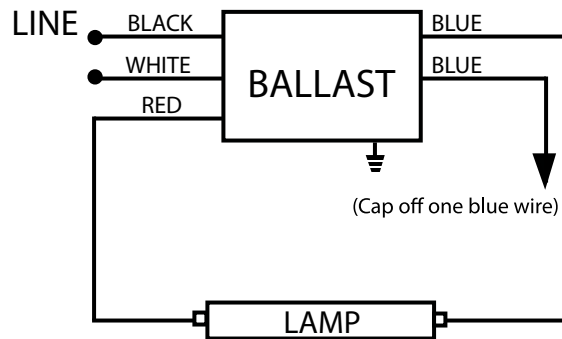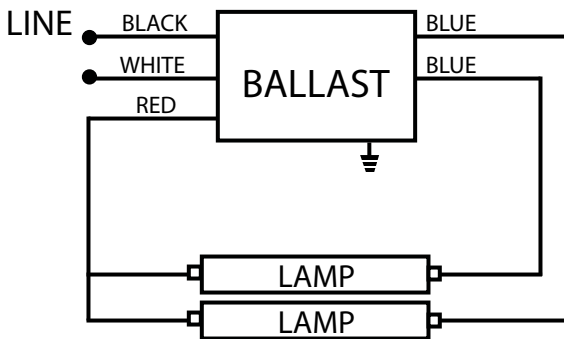


LEADS LENGTH

Black	18.0" (48.0 cm)
White	18.0" (48.0 cm)
Blue	31.0" (78.70 cm)
Red	46.5" (118.0 cm)
Yellow	46.0" (116.84 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.70" (4.30 cm)
Height (H):	1.14" (2.90 cm)
Mounting (M):	8.90" (22.60 cm)

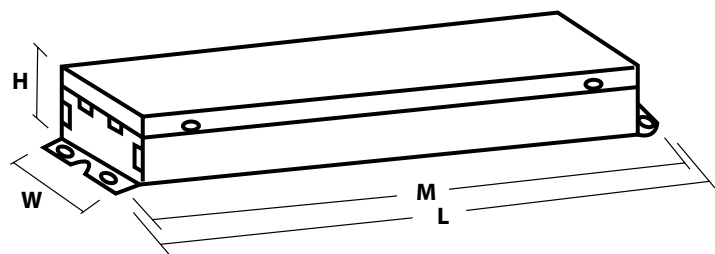

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015