

ORDERING INFORMATION

Order code: 10461
Description: E235T5PS347/N
UPC: 69549104617



SPECIFICATIONS

Ballast type:	Electronic	Type	1 Outdoor
Starting method:	Program Start	Contains PCBs:	No
Lamp connection:	Series	Sound rating:	A
Input voltage (V):	277-347V	Open current voltage (OCV) (V):	550
Input frequency (Hz):	60HZ	Inherent thermal protection:	Yes
Max. case temperature:	75 °C	Lamp protection circuit:	Yes
Thermal protection:	Class P	ICES-005 Compliant:	Class A RFLD
		End of life (EoL) protection:	Yes
		Auto-restrike:	Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
277 VOLTS										
F35T5 (35W)	2	35	-22/-30	0.28	77	0.90	9	0.99	1.4	1.17
F28T5 (28W)	2	28	-22/-30	0.24	65	0.94	9	0.99	1.4	1.45
F35T5 (35W)	1	35	-22/-30	0.15	40	0.99	7	0.99	1.4	2.48
F28T5 (28W)	1	28	-22/-30	0.12	34	1.00	9	0.99	1.4	2.94
347 VOLTS										
F35T5 (35W)	2	35	-22/-30	0.23	78	0.91	7	0.99	1.4	1.17
F28T5 (28W)	2	28	-22/-30	0.19	66	0.96	8	0.99	1.4	1.45
F35T5 (35W)	1	35	-22/-30	0.13	41	0.99	11	0.99	1.4	2.41
F28T5 (28W)	1	28	-22/-30	0.11	35	1.00	7	0.99	1.4	2.86

WARRANTY:


Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015

ORDERING INFORMATION


Order code: 10461
 Description: E235T5PS347/N
 UPC: 69549104617

WIRING DIAGRAM

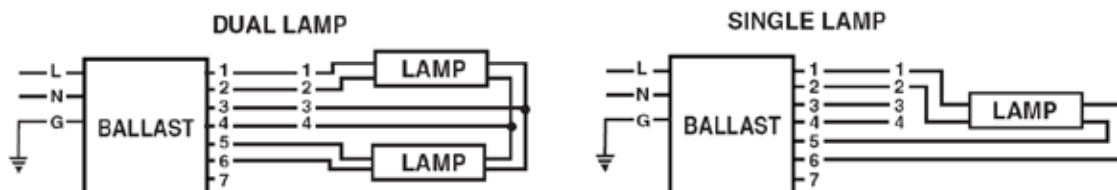

BALLAST DIMENSIONS

Length (L):	12.76" (32.41 cm)
Width (W):	1.34" (3.40 cm)
Height (H):	1.02" (2.59 cm)
Mounting (M):	12.25" (31.12 cm)

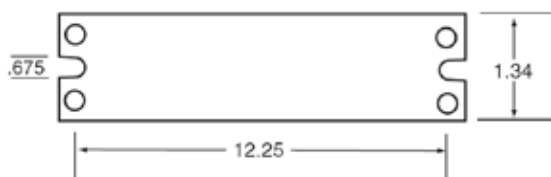

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015