


ORDERING INFORMATION

Order code: 60075
Description: E232T8IS120/H/90C
UPC: 69549600751

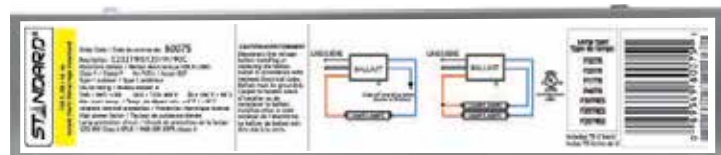

SPECIFICATIONS

Ballast type: Electronic
Starting method: Instant Start (IS)
Lamp connection: Parallel
Input voltage (V): 120V
Input frequency (Hz): 50/60HZ
Max. case temperature: 90 °C
Thermal protection: Class P

Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 600
Inherent thermal protection: Yes
Lamp protection circuit: Yes
ICES-005 Compliant: Class A RFLD
Auto-restrike: Yes



Lamp type	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
120 VOLTS										
F32T8 (32W)	2	32	0/-18	0.64	74	1.20	10	0.99	1.7	1.62
F32T8/ES (30W)	2	30	32/0	0.62	71	1.20	10	0.99	1.7	1.69
F32T8/ES (28W)	2	28	32/0	0.58	68	1.20	10	0.99	1.7	1.76
F32T8/ES (25W)	2	25	32/0	0.54	65	1.20	10	0.99	1.7	1.85
F25T8 (25W)	2	25	0/-18	0.49	60	1.21	10	0.99	1.7	2.02
F17T8 (17W)	2	17	0/-18	0.36	44	1.26	10	0.99	1.7	2.86
LED22T8 (22W)	2	22	0/-18	0.49	58	-	10	1.00	-	-
LED18T8 (18W)	2	18	0/-18	0.40	47	-	10	1.00	-	-
F32T8 (32W)	1	32	0/-18	0.40	48	1.41	10	0.99	1.7	2.94
F32T8/ES (30W)	1	30	32/0	0.40	45	1.41	15	0.98	1.7	3.13
F32T8/ES (28W)	1	28	32/0	0.38	43	1.41	10	0.99	1.7	3.28
F32T8/ES (25W)	1	25	32/0	0.34	41	1.41	15	0.99	1.7	3.44
F25T8 (25W)	1	25	0/-18	0.31	38	1.44	10	0.99	1.7	3.79
F40T8 (40W)	1	40	32/0	0.48	59	1.38	10	0.99	1.7	2.34
LED22T8 (22W)	1	22	0/-18	0.34	40	-	10	1.00	-	-
LED18T8 (18W)	1	18	0/-18	0.27	32	-	10	1.00	-	-

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:



Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C. For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 9, 2015

ORDERING INFORMATION

Order code: 60075
 Description: E232T8IS120/H/90C
 UPC: 69549600751

WIRING DIAGRAM

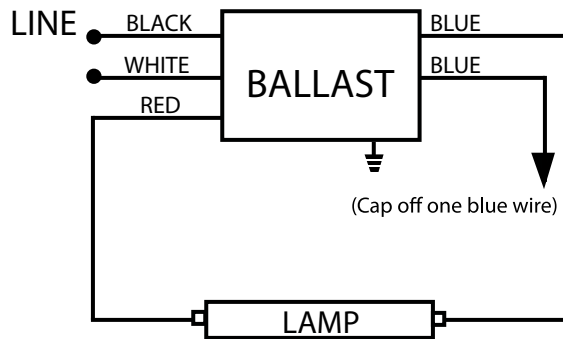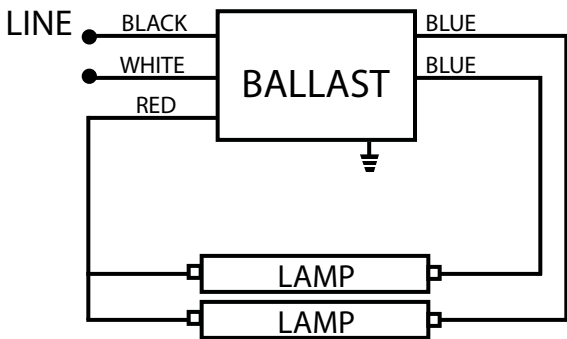


LEADS LENGTH

Black	18.8" (48.0 cm)
White	18.8" (48.0 cm)
Blue	30.9" (78.5 cm)
Red	46.4" (118.0 cm)

BALLAST DIMENSIONS

Length (L):	9.50" (24.10 cm)
Width (W):	1.30" (3.30 cm)
Height (H):	1.00" (2.54 cm)
Mounting (M):	8.90" (22.60 cm)

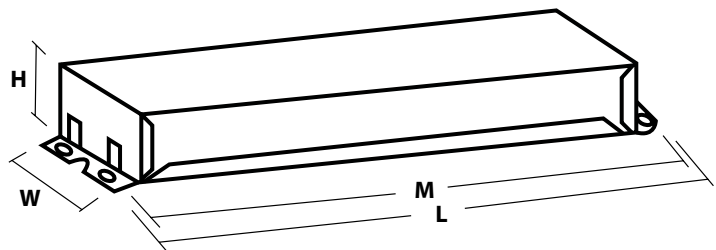

This lighting equipment complies with Canadian standard ICES-005; for use in commercial applications.

WARRANTY:

Ballast warranty of 5 years for electronic ballast 75 °C. Ballast warranty of 3 years for electronic ballast 90 °C.
 For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 9, 2015