

ORDERING INFORMATION


Order code: 10214
Description: BM214STS347/TP/STD
UPC: 69549102149

SPECIFICATIONS

Ballast type: Linear
Starting method: Trigger Start
Lamp connection: Series
Input voltage (V): 347 V
Input frequency (Hz): 60 HZ
Type: 1 Outdoor
Contains PCBs: No
Sound rating: A
Open current voltage (OCV) (V): 230
Thermal protection: Class P



WIRING DIAGRAM

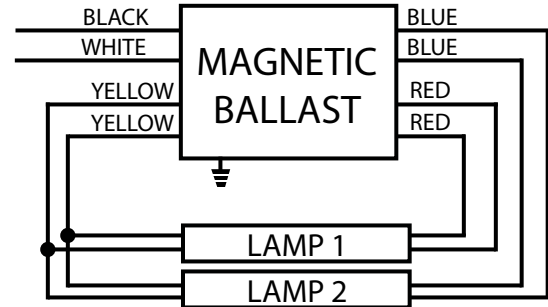


Lamp Type:	Number of lamps	Rated lamp watts	Min. start temp. (°F / °C)	Input current (A)	Input power (ANSI watts)	Ballast factor	Max THD (%)	Power factor	Max. lamp current crest factor	B.E.F.
347 VOLTS										
F20T12 (20W)	2	20	50/10	0.18	59	0.93	9	0.93	1.5	1.58
F15T12 (15W)	2	15	50/10	0.15	51	0.98	10	0.97	1.6	1.92
F14T12 (14W)	2	14	50/10	0.14	48	0.91	8	0.97	1.7	1.90
F15T8 (15W)	2	15	50/10	0.15	51	0.98	13	0.96	1.6	1.92
F14T8 (14W)	2	14	50/10	0.14	47	0.92	11	0.97	1.7	1.96

LEADS LENGTH

Black	22" (55.9 cm)
White	22" (55.9 cm)
Blue	26" (60 cm)
Red	26" (60 cm)
Yellow	36" (91.4 cm)

BALLAST DIMENSIONS

Length (L)	9.5" (24.1 cm)
Width (W)	2.4" (6 cm)
Height (H):	1.5" (3.8 cm)
Mounting 1 (M1)	1.7" (4.3 cm)
Mounting 2 (M2)	8.9" (22.6 cm)
Mounting 3 (M3)	8.3" (21.2 cm)

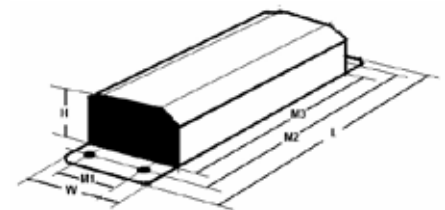

WARRANTY:
Ballast warranty of 2 years for magnetic ballasts. Ballast warranty of 3 years for energy saving magnetic ballasts.
For more information visit our website.

Data is based upon tests performed in a controlled environment and representative of relative performance.
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
March 30, 2015