


ORDERING INFORMATION

Order code: 10046
Description: BHPS1000/120/208/240/C/CWI/H/K
UPC: 69549100466



SPECIFICATIONS

Ballast type: Magnetic high pressure sodium
Ballast style: Core and coil
Circuit type: CWI
ANSI code: S52
Input voltage (V): 120/208/240
Input frequency (Hz): 60
Line volt regulation: $\pm 10\%$
Line watt regulation: Within trapezoid
Insulation class: H (180°)

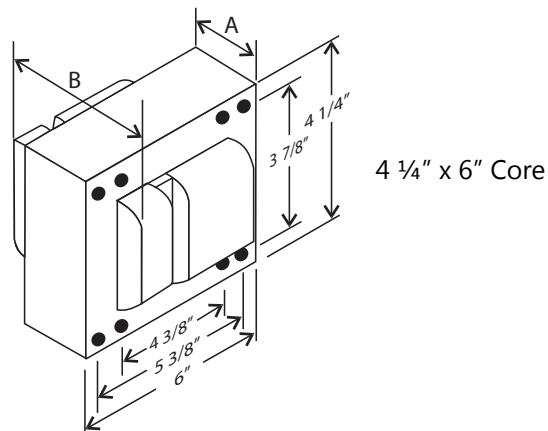

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	9.95	6.30	4.60	1 000	1 100	420	85	D	25	2.60 - 4.22	0.90	-40°F / -40°C
208	5.74	3.60	2.66	1 000	1 100	420	145	C	15	1.52 - 2.44	0.90	-40°F / -40°C
240	5.00	3.30	2.30	1 000	1 100	420	165	C	15	1.21 - 2.07	0.90	-40°F / -40°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	390 - 465
Short circuit:	6.20 - 6.90

BALLAST DIMENSIONS


Dimension A:	5.60"
Dimension B:	7.60"
Lead Lengths:	12.00"
Weight (lbs):	45.00

WIRING DIAGRAM


Ground ballast core

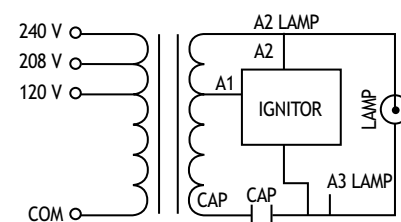

BRACKET

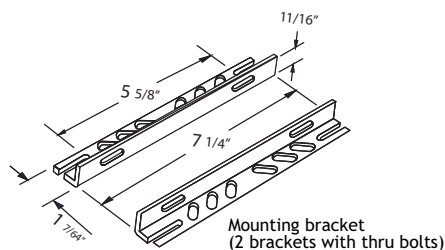

CAPACITOR

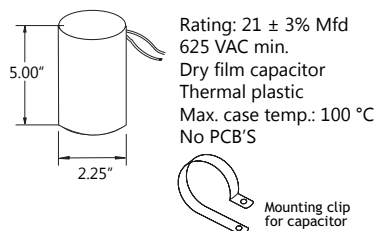

IGNITOR

