


ORDERING INFORMATION

Order code: 61695
Description: BHPS0400/5TAP/C/CWA/H/K/STD
UPC: 69549616950



SPECIFICATIONS

Ballast type: Magnetic high pressure sodium
Ballast style: Core and coil
Circuit type: CWA
ANSI code: S51
Input voltage (V): 120/208/240/277/480
Input frequency (Hz): 60
Line volt regulation: $\pm 10\%$
Line watt regulation: Within trapezoid
Insulation class: H (180°)

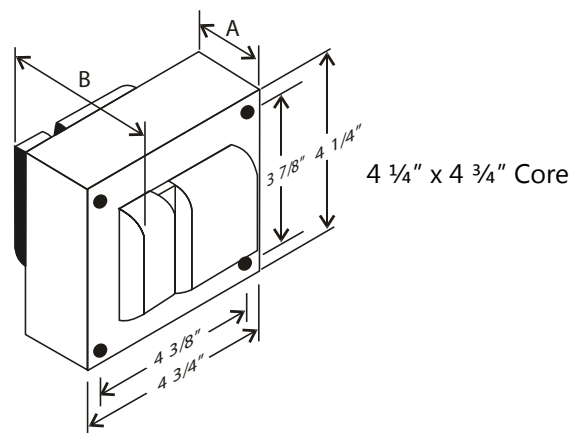

Input voltage (V)	Operating current (A)	Open circuit current (A)	Starting current (A)	Rated lamp watts (W)	Input watts (W)	OCV (V)	Dropout voltage (V)	UL 1029 code	Fuse rating (A)	Input current (A)	Power factor	Starting temperature
120	3.80	2.00	3.15	400	464	190	86	C	10	2.85 - 3.15	0.90	-40°F / -40°C
208	2.20	1.30	1.85	400	464	190	150	C	6	1.65 - 1.85	0.90	-40°F / -40°C
240	1.90	1.00	1.60	400	464	190	171	C	5	1.42 - 1.57	0.90	-40°F / -40°C
277	1.70	0.90	1.40	400	464	190	193	C	5	1.22 - 1.35	0.90	-40°F / -40°C
480	1.00	0.50	0.80	400	464	190	335	C	3	0.71 - 1.79	0.90	-40°F / -40°C

HIGH POTENTIAL TEST (V)


1 minute:	2 000
2 seconds:	2 500
OCV test:	177 - 210
Short circuit:	6.30 - 7.20

BALLAST DIMENSIONS


Dimension A:	2.72"
Dimension B:	4.80"
Lead Lengths:	12.00"
Weight (lbs):	16.50

WIRING DIAGRAM


Ground ballast core

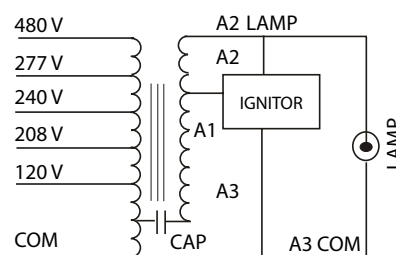

BRACKET

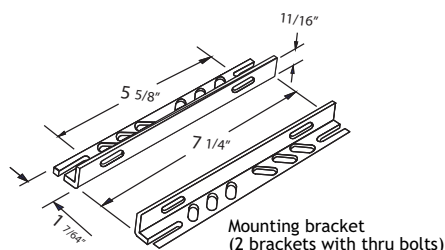

CAPACITOR

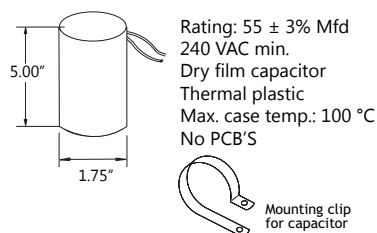

IGNITOR

