

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

*Individual Spec Sheet***T8-BYPASS
LED LINEAR TUBES****ORDERING INFORMATION**

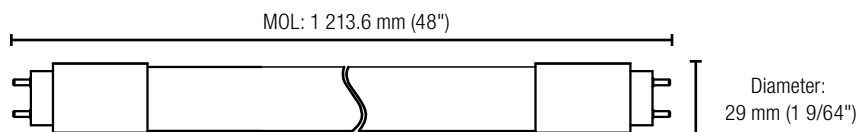
Order code: 68434
Model number: T8/S2/15W/835/48/BYP/120-277/ND/STD
UPC: 069549016187
Case quantity: 25
DLC unique ID: PL2ZUL7P85F0

PHYSICAL DATA

Dimensions: 48" (1 213,6 mm)
Shape: T8
Base: G13
Material: Glass

PERFORMANCE DATA

Installation method: Ballast bypass
Watts (W): 15
Volts (VAC): 120-277
Colour temperature (K)¹: 3 500
Lumen output (lm)²: 2 000
Efficiency (lm/W): 133
CRI: 82
Beam angle: 220°
Life L70 (h)³: 56 000
Operating temp. range: -25°C/-13°F to 45°C/ 113°F

¹ Typical colour temperature range: +/- 5 %² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations
This product complies with UL1598C Standard for LED luminaire Retrofit kits. Not suitable for hazardous location.**DIMENSIONS****ADDITIONAL INFORMATION**

Only for ballast bypass installation in 120-277 V applications.
 Not for use in 347 V direct line voltage applications.
 Direct replacement for 25, 28, 30 & 32 watts T8 lamps only.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



5
 yrs
warranty

6
damp
location

non
dimmmable

enclosed
fixture

ICES
005

FCC

DLC QPL
LISTED

RoHS

CLASSIFIED
UL US

cUL US

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.