

# Technical Information Bulletin

## Design LED Filament Lamps




Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 67668  
Description: G40/S3/4.5W/22K/A/O/FIL/STD  
UPC: 69549676688  
Case quantity: 5 / 20

### PHYSICAL DATA

Shape: G40  
Base: E26  
Finish: Amber  
Filament type: Oblique

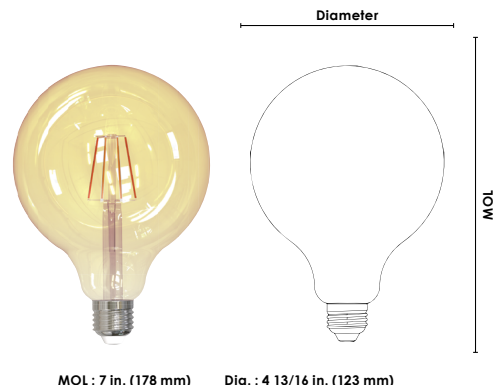

### PERFORMANCE DATA

Watts (W): 4.5  
Volts (VAC): 120  
Colour temp. (K)<sup>1</sup>: 2 200  
Lumen output (lm)<sup>2</sup>: 380  
Lumen per Watts (lm/W): 84  
Traditional equivalent (W): 40  
CRI: 80  
Life L70 (h): 15 000  
Beam angle (°): 360  
Power factor: 0.9  
Frequency (Hz): 60  
Dimming: Forward and reverse  
Burning position: Universal  
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %  
<sup>2</sup> Initial lumens range: +/- 5 %

### COMPATIBLE DIMMERS

BRAND	MODEL
LEGRAND	RH703PTUTC
COOPER	RRD-6NA, SLC03P
LEVITON	6615, 6674, DDMX1, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, IPL06
LUTRON	AYCL-253P, DVCL-153P, DVCL-253P, DVRP-253P, MACL-153P, SELV-300P



dimmmable  
fixture

6

damp  
location



enclosed  
fixture

2  
yrs

warranty



ICES  
005



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
Data is based upon tests performed in a controlled environment and representative of relative performance.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

January 30, 2023