

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

CIRKA

SQUARE LED CEILING LUMINAIRE

3 CCT Selectable

Slim & Lightweight

ORDERING INFORMATION

Order Code: 68737
Model Number: CRK7-S12W-A-3CWH
UPC: 069549018792
Case Quantity: 40

PHYSICAL DATA

Dimensions: 7" (162 mm)
Lens Finish: Frosted
Housing Material: PC
Housing Finish: White
Mounting: Surface

PERFORMANCE DATA

Watts (W): 12
Volts (VAC): 120
Colour Temperature (K)¹: 3 000/4 000/5 000
Lumen Output (lm)²: 800
Efficiency (lm/W): 67
CRI: 80
Life L70 (h)³: 50 000
Dimming : Yes
Power Factor: 0.9
THD (%): <40
Frequency (Hz): 60
Operating Temp. Range: -10 °C to 45 °C (14 °F to 113 °F)

¹ Typical colour temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %. Please refer to Lumen Specification Table for more details on other color temperatures.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE


Order code	Model number	3 000 K		4 000 K		5 000 K	
		Lumen output (lm)	Efficiency (lm/W)	Lumen output (lm)	Efficiency (lm/W)	Lumen output (lm)	Efficiency (lm/W)
68737	CRK7-S12W-A-3CWH	842	70	922	77	860	72

Default programming: 3 000 K

COMPATIBLE ACCESSORIES

Order code	Model number	Type	Case qty (master)
68740	RNG-TRM7-SQR-SN	7" Satin Nickel trim	40
68741	RNG-TRM7-SQR-BK	7" Matte Black trim	40
68742	RNG-TRM7-SQR-CH	7" Polished Chrome trim	40


SCREWLESS MAGNETIC TRIMS



Satin Nickel

Matte Black

Polished Chrome




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS

Brand	Model
LUTRON	PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P, RRD-6NA-WH
COOPER	AAL06, SLC03P
LEVITON	066EV, IPL06, 6674, DSL06-1ZL, IPE04-1LZ

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.

DIMENSIONS

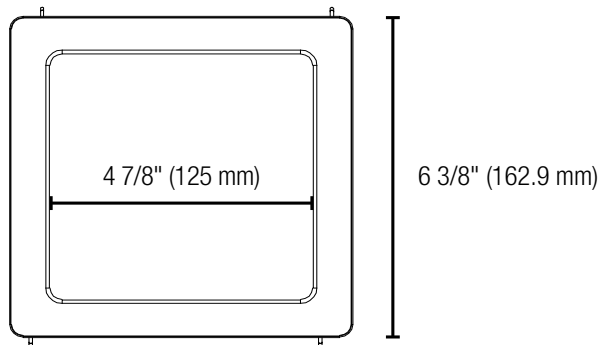


SCREWLESS MAGNETIC TRIMS

PHOTOMETRIC DATA¹

68737 • CRK7-S12W-A-3CWH • 842 lm • 3 000 K

Polar candela distribution

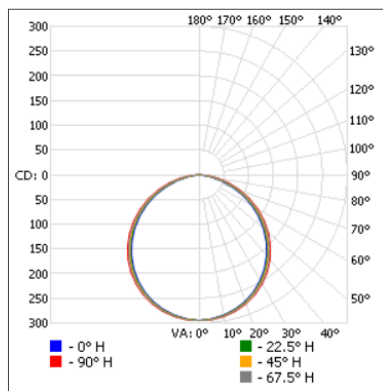

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	229.4	27.2
0-40	376.5	44.7
0-60	666.5	79.1
60-90	175.6	20.9
0-90	842.2	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	102	4.8'	5.4'
3.3'	27.0	9.4'	10.5'
5.0'	11.8	14.2'	15.9'
6.7'	5.56	19.1'	21.3'
8.3'	4.28	23.6'	26.4'
10.0'	2.95	28.5'	31.8'
Vert. spread: 109.9°			
Horiz. spread: 115.7°			

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.