

Project: _____ Type: _____

Drawn by: _____ Catalogue #: _____ Date: _____

*Individual Spec Sheet***DESIGN LED LAMP****ORDERING INFORMATION**

Order code: 68990
Model number: G9/S2/4W/30K/CL/DESIGN/STD
UPC: 069549023154
Case quantity: 100 / 200

PHYSICAL DATA

Shape: JD
Base: G9
Finish: Clear

PERFORMANCE DATA

Watts (W): 4
Volts (VAC): 120
Color temperature (K)¹: 3 000
Lumen output (lm)²: 350
Efficiency (lm/W): 88
Traditional equivalent (W): 40
CRI: 80
Life L70 (h)³: 20 000
Beam angle (°): 360
Power factor (%): 0.7
Operating temp. range: - 20 °C to 40 °C (- 4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

NOTE: Usage in enclosed fixtures or at temperatures above the recommended operating temperature may reduce lamp life.

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	PD-5NE, PD-6WCL, RRD-6NA-WH, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P
COOPER	AAL06, SAL06P3
LEVITON	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1

Dimming range: 10%-100%

¹This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.



2^{yrs}
warranty

dimmable

**damp
location**

**enclosed
fixture**



**ICES
005**

LISTED


FC

This lighting equipment meets requirements of ICES-005 issue class B for use in residential applications..

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

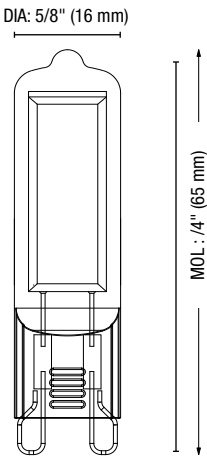

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.