

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED HIGH OUTPUT LAMP PS30

### ORDERING INFORMATION

**Order Code:** 68926  
**Model Number:** PS30/36W/40K/120-277/EX39/STD  
**UPC:** 069549022522  
**Case Quantity:** 6  
**DLC Unique ID:** PF140ZRD

### PHYSICAL DATA

**Shape:** PS30  
**Base:** EX39  
**Heat Sink Color:** White  
**Finish:** Frosted

### PERFORMANCE DATA

**Watts (W):** 36  
**Traditional Equivalent (W):** 300  
**Volts (VAC):** 120-277  
**Color Temperature (K)<sup>1</sup>:** 4 000  
**Lumen Output (lm)<sup>2</sup>:** 4 500  
**Efficacy (lm/W):** 125  
**CRI:** 80  
**Life L70 (h)<sup>3</sup>:** 50 000  
**Beam Angle (°):** 270  
**Power Factor (%):** 0.90  
**Frequency (Hz):** 60  
**Operating Temp. Range:** - 30 °C to 40 °C (- 22 °F to 104 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
COOPER	AAL06
LEVITON	DDMX1
LUTRON	RRD-6NA-WH, DVCL-153P, DVRP-253-WH, SELV-300P, MACL-153P

Dimming range: 10%-100%

<sup>1</sup>This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

This lighting equipment meets requirements of ICES-005 issue class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



**5** yrs  
warranty

  
dimmable

  
damp  
location

  
enclosed  
fixture

  
RoHS


  
CERTIFIED

  
FCC

  
DLC  
LISTED

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

DIMENSIONS

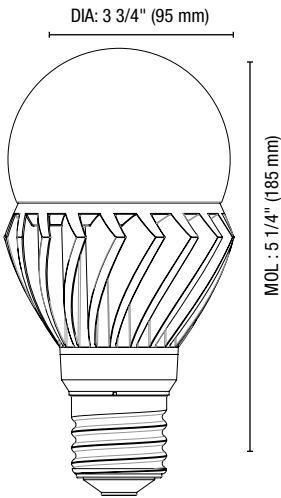

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.