

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED HIGH OUTPUT LAMP A21

### ORDERING INFORMATION

**Order Code:** 69003  
**Model Number:** A21HO/20W/30K/120-277/ND/STD  
**UPC:** 069549023277  
**Case Quantity:** 12

### PHYSICAL DATA

**Shape:** A21  
**Base:** E26  
**Heat Sink Color:** White  
**Finish:** Frosted

### PERFORMANCE DATA

**Watts (W):** 20  
**Traditional Equivalent (W):** 150  
**Volts (VAC):** 120-277  
**Color Temperature (K)<sup>1</sup>:** 3 000  
**Lumen Output (lm)<sup>2</sup>:** 2 600  
**Efficacy (lm/W):** 130  
**CRI:** 80  
**Life L70 (h)<sup>3</sup>:** 25 000  
**Beam Angle (°):** 220  
**Power Factor (%):** 0.90  
**Frequency (Hz):** 50/60  
**Operating Temp. Range:** - 30 °C to 40 °C (- 22 °F to 104 °F)

<sup>1</sup> Typical colour temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.



**5<sup>yrs</sup>**  
**warranty**

  
**non**  
**dimmable**

**6**  
**damp**  
**location**

  
**enclosed**  
**fixture**

**RoHS**

  
**CERTIFIED**


**FC**

This lighting equipment meets requirements of ICES-005 issue class B for use in residential applications..

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

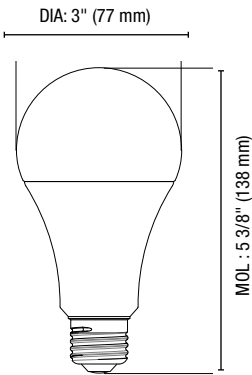

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.