

Individual Spec Sheet

CONTEMPORARY SQUARE LED WALL SCONCE LUMINAIRE 3 CCT SELECTABLE

ORDERING INFORMATION

Order code: 69035
Model number: SVANCO38-S28W-A-3CBN
UPC: 069549023628
Case quantity: 4

PHYSICAL DATA

Dimensions in (mm): 38" (968)
Lens material: PMMA lens with a frosted finish
Housing material: Steel housing
Housing finish: Brushed nickel
Mounting: Wall mounted, surface

PERFORMANCE DATA

Watts (W): 28
Volts (VAC): 120
Color temperature (K): 3 000/3 500/4 000
Lumen output (lm): 2 197
Efficacy (lm/W): 78
CRI: 90+
Life L70 (h): 50 000
Dimming: Yes
Power factor: ≥0.90
Frequency (Hz): 60
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %.
² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.
³ Lumen values are based on 3 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.
⁴ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	3 000 K		3 500 K		4 000 K	
			Lumen output (lm)	Efficacy (lm/w)	Lumen output (lm)	Efficacy (lm/w)	Lumen output (lm)	Efficacy (lm/w)
69035	SVANCO38-S28W-A-3CBN	28	2 197	78	2 338	84	2 266	81

DEFAULT PROGRAMMING

3 000 K



5 yrs
warranty



quick ship



LED fixture



dimnable



damp location



ICES 005




COMPATIBLE DIMMERS¹

BRAND	Model
LEGRAND	RH703PTUTC
COOPER	SAL06P3
LEVITON	066EV, IPL06, 6674, DSL06-1ZL, DSM10-1LZ, IPE04-1LZ, DDMX1
LUTRON	PD-5NE, PD-6WCL, RRD-6NA-WH, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P

Dimming range: 10%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

DIMENSIONS AND WEIGHT

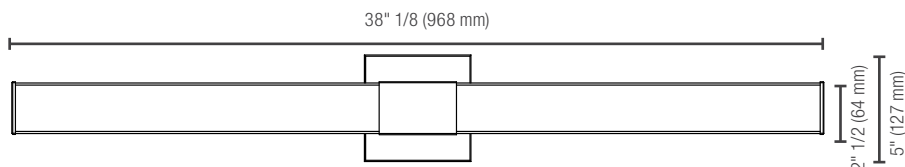


	38"
Net weight (lbs)	3.97

PHOTOMETRIC DATA¹

69035 • SVANC038-S28W-A-3CBN • 28 W • 3 000 K • 2 197.3 lm

Polar candela distribution

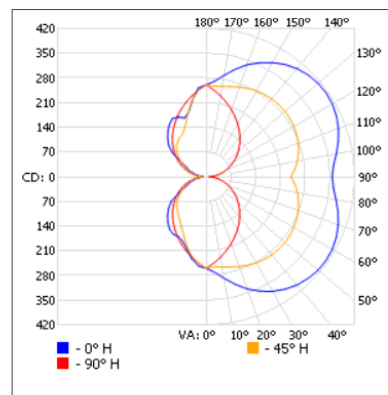

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	194.7	8.9
0-40	329.7	15
0-60	652.9	29.7
60-90	449.6	20.5
70-100	420.0	19.1
90-120	448.3	20.4
0-90	1 102.5	50.2
90-80	1 094.8	49.8
0-180	2 197.3	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	89.9	4.5'	4.7'
3.3'	23.9	8.8'	9.1'
5.0'	10.4	13.3'	13.8'
6.7'	5.79	17.9'	18.4'
8.3'	3.77	22.1'	22.9'
10.0'	2.60	26.7'	27.5'

■ Vert. spread: 106.2°
■ Horiz. spread: 108.0°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.