

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED PL LAMPS

CCT Selectable

ORDERING INFORMATION

Order code: 69384
Model number: PLV-H/S2/6W/TT/3CCT1/GX23/ND/STD
UPC: 069549026933
Case quantity: 20

PHYSICAL DATA

Shape: PL
Base: GX23
Length in. (mm): 7 1/10 (180)
Diameter in. (mm): 1 1/4 (33)

PERFORMANCE DATA


Watts (W): 6
Volts (V AC): 120-277
Color temperature (K): 3 000/4 000/5 000
Lumen output (lm): 615-675
Efficacy (lm/W): 103-113
CRI: 83
Beam angle (°): 180/360
Life L70 (h): 50 000
Dimming (yes/no): No
Power factor: 0.90
THD (%): 25
Frequency (Hz): 50/60
Input current (mA): 55
Operating temp. range: -20 °C to 45 °C (-4 °F to 113 °F)
Installation method: ballast bypass

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.


DIMENSIONS

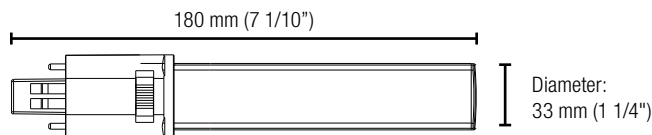

COMPATIBLE BASES

LED PL Base	CFL bases replacement
GX23	GX23, GX23-2

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, the base of this LED lamp can be compatible with all GX23 CFL bases.



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



5 yrs
warranty

6
damp
location

ICES
005

enclosed
fixture

RoHS

UL
CERTIFIED

c UL US

FC