

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

*Individual Spec Sheet***LED PL LAMPS**

CCT Selectable

ORDERING INFORMATION


Order code: 69386
Model number: PLVL/S2/9W/3CCT/4P/ND/STD
UPC: 069549026957
Case quantity: 50
DLC Unique ID: S-14E53S

PHYSICAL DATA

Shape: PL
Base: G24Q
Length in. (mm): 4 3/4 (119)
Diameter in. (mm): 2 1/8 (54)


PERFORMANCE DATA

Watts (W): 9
Volts (V AC): 120-277 / 347V (depends on ballast)
Color temperature (K):¹ 3 000/3 500/4 000
Lumen output (lm):² 1 025-1 100
Efficacy (lm/W): 93-100
CRI: 83
Beam angle (°): 120
Life L70 (h):³ 50 000
Dimming (yes/no): Yes
Dimming type: Continuous Dimming to 10% or below
Power factor: 0.90
THD (%): 25
Frequency (Hz): 50/60
Input current (mA): 100 (depend on ballast)
Operating temp. range: -20 °C to 45 °C (-4 °F to 113 °F)
Installation method: Ballast compatible

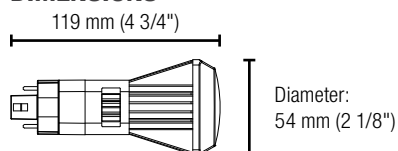¹ Typical color temperature range: +/- 5 %.² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.**DIMENSIONS****COMPATIBLE BASES**

LED PL Base	CFL bases replacement
G24q-13W	G24q-2, G24q-3, GX24q-2, GX24q-3

NOTE: This LED lamp is a direct replacement for the CFL bases listed above.
 However, this LED lamp is compatible with all G24q and GX24q CFL bases.



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



5 yrs
warranty

6
damp
location

ICES
005

**enclosed
fixture**

RoHS

**UL
CERTIFIED**

FC

**DLC
LISTED**