

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

T8 - BALLAST COMPATIBLE LED LINEAR TUBES

ORDERING INFORMATION

Order code: 69298
Model number: T8/S5/11W/840/48/STD
UPC: 069549026087
Case quantity: 25
DLC unique ID: S-ODVMPF

PHYSICAL DATA

Shape: T8
Base: G13
Material: Glass
Length mm (in): 1 219 (48)

PERFORMANCE DATA


Installation Method: Ballast compatible
Bare Lamp Watts (W): 11
NBF Wattage (W): 13
Volts (VAC): 120-277/347
Color temperature (K)¹: 4 000
Lumen output (lm)²: 1 800
CRI: 82
Life L70 (h)³: 50 000
Beam Angle: 210°
Dimming: Depends on the ballast
Power factor: 0.90
Frequency (Hz): 50/60
Operating temp. range: -20°C to 45°C (-4°F to 113°F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

DIMENSIONS

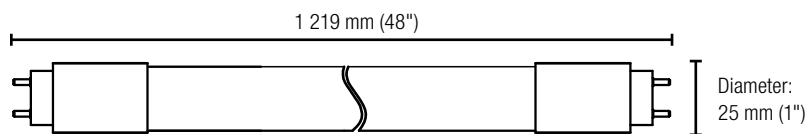

5 yrs
warranty

6
damp
location

ICES
005

enclosed
fixture

RoHS

cUL US

FC

DLC
LISTED

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.