

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED PL LAMPS

## 5 CCT SELECTABLE

### ORDERING INFORMATION

**Order code:** 69602  
**Model number:** PLH/S2/6W/5CCT/G24Q/ND/STD  
**UPC:** 069549028159  
**Inner box quantity:** 10

### PHYSICAL DATA

**Base:** G24Q  
**Shape:** PL Horizontal

### PERFORMANCE DATA


**Watts (W):** 6  
**Traditional equivalent (W):** 13  
**Volts (VAC):** 120-277  
**Color temperature (K)1:** 2 700/3 000/3 500/4 000/5 000  
**Lumen output (lm)2:** 550/575/600/625/625  
**Efficacy (lm/W):** 92/96/100/104/104  
**CRI:** 83  
**Life L70 (h)3:** 50 000  
**Beam angle (°):** 120  
**Power factor:** 0.96  
**Frequency (Hz):** 50-60  
**Starting method:** Ballast bypass  
**Operating temp. range:** Open Fixture: -20 °C to 35 °C (-4 °F to 95 °F)  
 Enclosed Fixture: -20 °C to 25 °C (-4 °F to 77 °F)  
**Application (Indoor/Outdoor):** Indoor

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.


### DIMENSIONS

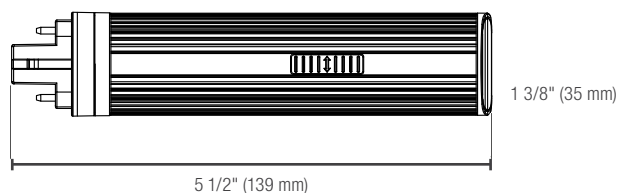

\*LED PL Bases Replacement for CFL bases

G24q-6W G24q-1, GX24q-1

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, the base of this LED lamp can be compatible with all G24q and GX24q CFL bases.



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

