

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED PL LAMPS

CCT Selectable

## ORDERING INFORMATION

**Order Code:** 69385  
**Model Number:** PLH/S2/8W/3CCT/2P/ND/STD  
**UPC:** 069549026940  
**Case Quantity:** 50

## PHYSICAL DATA

**Shape:** PL  
**Base:** G24D  
**Length in. (mm):** 5 7/8 (150)  
**Diameter in. (mm):** 1 5/8 (41)

## PERFORMANCE DATA


**Watts (W):** 8  
**Volts (V AC):** 120-277  
**Color Temperature (K)<sup>1</sup>:** 3 000/3 500/4 000  
**Lumen Output (lm)<sup>2</sup>:** 975-1 075  
**Efficacy (lm/W):** 122-134  
**CRI:** 83  
**Beam Angle (°):** 120  
**Life L70 (h)<sup>3</sup>:** 50 000  
**Dimming (yes/no):** No  
**Power Factor:** 0.90  
**THD (%):** 25  
**Frequency (Hz):** 50/60  
**Input Current (mA):** 75  
**Operating Temp. Range:** -20 °C to 45 °C (-4 °F to 113 °F)  
**Installation Method:** Ballast bypass

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.


## DIMENSIONS

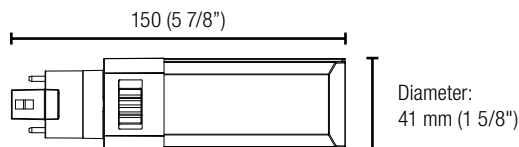

## COMPATIBLE BASES

LED PL Base	CFL bases replacement
G24d-2P	G24d-2, G24d-3

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, this LED lamp is compatible with all G24d CFL bases.



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



**5** yrs  
warranty

6  
damp  
location

ICES  
005

enclosed  
fixture

RoHS

UL  
CERTIFIED

c UL US

FC