

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

VTE4-L GEN. 2

LED VAPOR TIGHT

ORDERING INFORMATION

Order code: 69595
Model number: VTE4-LS4B-Q-3C
UPC: 069549028081
Case quantity: 6
DLC Unique ID: 6 S-XFTL18 (DLC Premium) / S-RJ5MKU (DLC Standard)

PHYSICAL DATA

Size in. (cm): 50.79" x 6.81" x 3.86" (129.0 x 17.3 x 9.8 cm)
Lens material: UV stabilized polycarbonate frosted lens
Latch material: Stainless steel
Housing material: Polycarbonate
Mounting: Wall, ceiling or suspended

PERFORMANCE DATA

Watts (W): 60 W
Volts (V AC): 120-347
Color temperature (K)¹: 3CCT (3 500/4 000/5 000 K)
Lumen output (lm)^{2,3}: 8 441
Efficacy (lm/W): 141
CRI: 80+
Life L70 (hrs)⁴: 135 000
Tested LM-80 (hrs)⁴: 9 000
Dimming: 0-10 V
Power factor: > 0.90
THD (%): < 20
Frequency (Hz): 60
Surge protection (kV): 2.0
Operating temp. range: -40 °C to +40 °C (-40 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁴ Life hours are derived from IESNA LM-08 testing report and projected per IESNA TM-11 extrapolations.

LUMEN SPECIFICATION TABLE

Order code	3 500 K		4 000 K		5 000 K	
	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
69595	8 069	33	8 441	141	8 281	137



Not all products are qualified on the DLC QPL.
 To view our DLC qualified products, please
 consult the DLC Qualified Products List at
www.designlights.org/search.

COMPATIBLE DIMMERS¹

Brand	Model
LUTRON	DVSTV-HX DIVA 8 AMP 3-WAY/SINGLE -POLE 0-10V DIMMER
EATON	Controls DF10P-CI DECORATOR 0-10V DIMMER
COOPER	SF10P-W
LUXDRIVE	DIMMING CONTROL - 0-10V LOW VOLTAGE WALL MOUNT CONTROL
LUTRON	DVTV-WH DIVA 30mA SINGLE POLE 0-10V FLUORESCENT DIMMER
LEVITON	DS710-10Z

Dimming range: 10%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.


ACCESSORIES (ORDER SEPARATELY)

Order code	Type
68834 ¹	Replacement stainless steel latch (1pc)
CAS060-KITS-JP ²	Replacement mounting hardware kit
CAS060-LENS-BR-FR	4" replacement frosted polycarbonate lens (1pc)
CAS060-MC-JP ¹	Replacement polycarbonate latch (1pc)

¹ 10 latches are required per fixture


² Mounting hardware replacement kit includes: V-hooks (2), stainless steel surface mount brackets for ceiling mount (2), PC latches (2), watertight end cap (1), nickel plated M4 screws 1.5 x 2.5mm (4), nickel plated M4 washers (4), drywall plugs (4), wire nuts (3)

DIMENSIONS

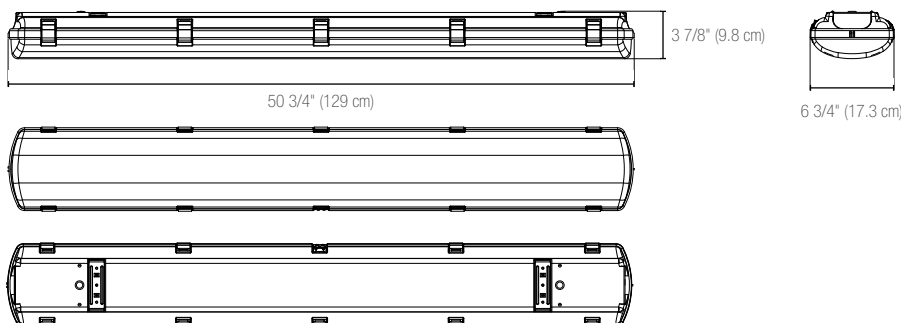PHOTOMETRIC DATA¹

69595 • VTE4-LS4B-Q-3C • 4 000 K • 8 433 LM

Polar candela distribution

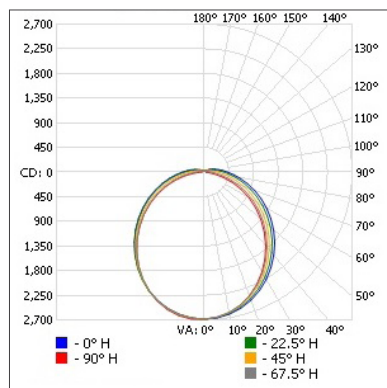

Zonal lumen summary

Zone	Lumens	% Luminaire
0-30	2 059.2	24.4
0-40	3 349.9	39.7
0-60	5 895.3	69.9
60-90	2 042.4	24.2
70-100	1 273.4	15.1
90-120	393.5	4.7
0-90	7 937.8	94.1
90-180	495.4	5.9
0-180	8 433.2	100

Illuminance at a distance

Center beam fc	Beam width
1.7'	929
3.3'	247
5.0'	107
6.7'	59.8
8.3'	39.0
10.0'	26.9

Vert. spread:	117.0°
Horiz. spread:	105.1°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.