

Project: _____

Type: _____

Drawn by: _____ Catalogue #: _____

Date: _____

Individual Spec Sheet

IMPRESSION

LED WALL SCONCE LUMINAIRE 5 CCT SELECTABLE

ORDERING INFORMATION

Order code: 69562
Model number: SVANIM10-R20W-A-5CBN
UPC: 069549027695
Case quantity: 4

PHYSICAL DATA

Length in. (cm): 10 1/8 (25.6)
Lens material: PC lens with a frosted finish
Housing material: Aluminum housing
Housing finish: Brushed nickel
Mounting: Wall mounted, surface

PERFORMANCE DATA

Watts (W): 20
Volts (V AC): 120
Color temperature (K)¹: 2 700/3 000/3 500/4 000/5 000
Lumen output (lm)²: 1 500
Efficacy (lm/W): 75
CRI: 90+
Life L70 (h)³: 50 000
Dimming: Phase-Cut (ELV / Triac)
Power factor: ≥0.90
Frequency (Hz): 60
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %. Please refer to Lumen Specification Table for more details on other color temperatures.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
			Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
69562	SVANIM10-R20W-A-5CBN	20	1 620	81	1 706	85	1 725	86	1 735	87	1 661	83

DEFAULT PROGRAMMING

3 000 K



2 700/3 000/3 500/4 000/5 000 K



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS¹



Brand	Model
Legrand	SLC03P
Cooper	RRD-6NA-WH, AAL06, SLC03P
Leviton	066EV, IPL06, 6674, DSL06-1ZL, DSM10-1LZ, IPE04-1LZ, DDMX1
Lutron	PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P

Dimming range: 10%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

DIMENSIONS AND WEIGHTS

10"




	10"
Net weight (lbs)	2.65

PHOTOMETRIC DATA¹

69562 • SVANIM10-R20W-A-5CBN • 3 000 K • 1 705.8 lm

Polar candela distribution

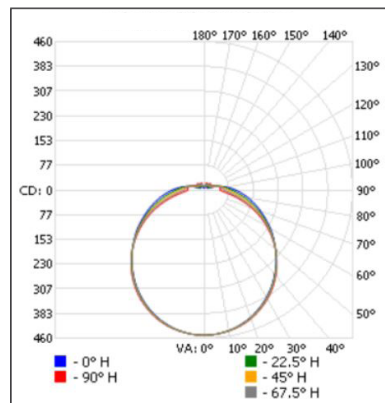

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	353.0	20.7
0-40	582.9	34.2
0-60	1 060.5	62.2
60-90	444.1	26
70-100	317.2	18.6
90-120	143.5	8.4
0-90	1 504.6	88.2
90-180	201.2	11.8
0-180	1 705.8	100

Illuminance at a distance

Center beam fc		Beam width	
1.7'	156	6.4'	5.8'
3.3'	41.4	12.4'	11.3'
5.0'	18.0	18.8'	17.2'
6.7'	10.0	25.2'	23.0'
8.3'	6.54	31.2'	28.5'
10.0'	4.51	37.6'	34.4'

■ Vert. spread: 124.0°
■ Horiz. spread: 119.6°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.