

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# IMPRESSION

## LED WALL SCONCE LUMINAIRE 5 CCT SELECTABLE

### ORDERING INFORMATION

**Order code:** 69563  
**Model number:** SVANIM10-R20W-A-5CBK  
**UPC:** 069549027701  
**Case quantity:** 4

### PHYSICAL DATA

**Length in. (cm):** 10 1/8 (25.6)  
**Lens material:** PC lens with a frosted finish  
**Housing material:** Aluminum housing  
**Housing finish:** Black  
**Mounting:** Wall mounted, surface

### PERFORMANCE DATA

**Watts (W):** 20  
**Volts (V AC):** 120  
**Color temperature (K)<sup>1</sup>:** 2 700/3 000/3 500/4 000/5 000  
**Lumen output (lm)<sup>2</sup>:** 1 500  
**Efficacy (lm/W):** 75  
**CRI:** 90+  
**Life L70 (h)<sup>3</sup>:** 50 000  
**Dimming:** Phase-Cut (ELV / Triac)  
**Power factor:** ≥0.90  
**Frequency (Hz):** 60  
**Operating temp. range:** -20 °C to 40 °C (-4 °F to 104 °F)

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %. Please refer to Lumen Specification Table for more details on other color temperatures.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### LUMEN SPECIFICATION TABLE

Order code	Model number	Watts (W)	2 700 K		3 000 K		3 500 K		4 000 K		5 000 K	
			Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
69563	SVANIM10-R20W-A-5CBK	20	1 551	77	1 594	80	1 648	82	1 654	83	1 593	80

#### DEFAULT PROGRAMMING

3 000 K



2 700/3 000/3 500/4 000/5 000 K



This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS<sup>1</sup>



Brand	Model
Legrand	SLC03P
Cooper	RRD-6NA-WH, AAL06, SLC03P
Leviton	066EV, IPL06, 6674, DSL06-1ZL, DSM10-1LZ, IPE04-1LZ, DDMX1
Lutron	PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P

Dimming range: 10%-100%

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

## DIMENSIONS AND WEIGHTS

10"




	10"
Net weight (lbs)	2.65

PHOTOMETRIC DATA<sup>1</sup>

69563 • SVANIM10-R20W-A-5CBK • 3 000 K • 1 594.5lm

## Polar candela distribution

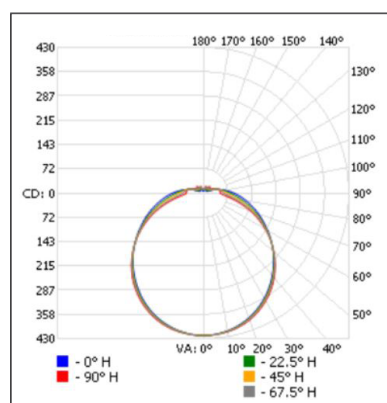

## Zonal lumen summary

Zone	Lumens	% Fixture
0-30	330.3	20.7
0-40	545.4	34.2
0-60	992.0	62.2
60-90	413.5	25.9
70-100	296.5	18.6
90-120	136.0	8.5
0-90	1 405.5	88.1
90-180	189.0	11.9
0-180	1 594.5	100

## Illuminance at a distance

Center beam fc		Beam width	
1.7'	145	6.3'	5.9'
3.3'	38.6	12.2'	11.4'
5.0'	16.8	18.4'	17.3'
6.7'	9.36	24.7'	23.2'
8.3'	6.10	30.6'	28.8'
10.0'	4.20	36.9'	34.6'

■ Vert. spread: 123.1°  
■ Horiz. spread: 120.0°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.