

Individual Spec Sheet

WDP-L

DECORATIVE WALL PACK

3 CCT Selectable and integrated photocell

ORDERING INFORMATION

Order code: 69727
Model number: WDP-LS1-W-3C-BK
UPC: 069549029484
Case quantity: 10
DLC unique ID: S-GYTORM

PHYSICAL DATA

Finish: Black
Housing material: Die-cast aluminum
Lens material: Prismatic polycarbonate

PERFORMANCE DATA

Watts (W): 15
Volts (V AC): 120-277
Color temperature (K)¹: 3 000/4 000/5 000
Lumen output (lm)²: 1,884
Efficacy (lm/W): 132
CRI: 80+
Life L70 (h)³: 163,000
THD (%): 7.4
IP rating: IP65
IK rating: IK08
Power factor: 0.931
Surge protection (kV): 2.5
Traditional equivalent (HPS): 50
Dimming: Yes
B.U.G. rating: B0 U2 G1
Distribution type: III
Photocell: Yes
Operating temp. range: -40 °C to 45 °C (-40 °F to 113 °F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

COMPATIBLE DIMMERS¹


Brand	Model
Lutron	NTSTV-DV, NFTV, DVTW-WH
Leviton	DS710, IP710
Legrand	H4FBL3PW

Dimming range: 0%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.


This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



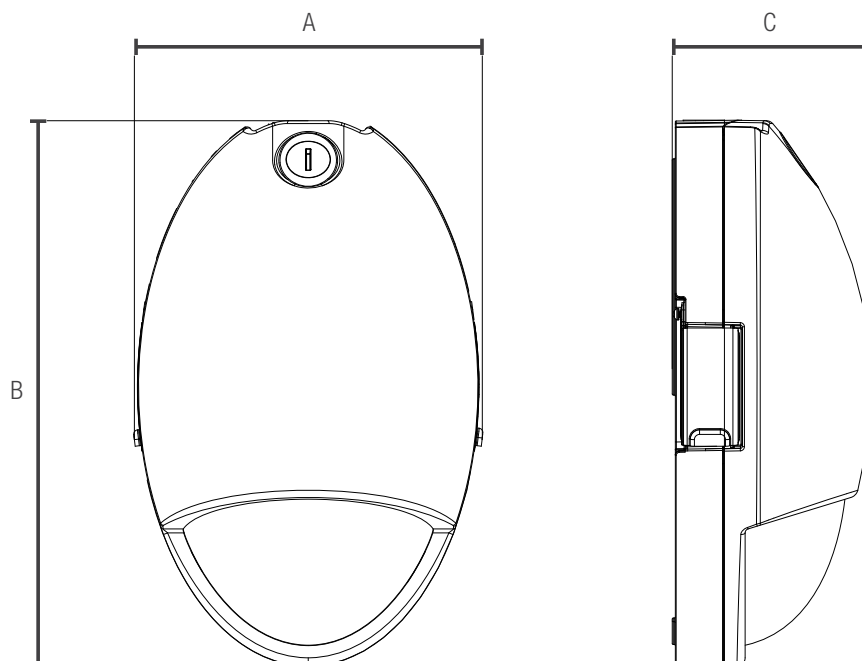


A in. (cm)	6 5/8" (16.8)
B in. (cm)	10 3/8" (26.3)
C in. (cm)	3 3/4" (9.61)
Net weight (lbs)	3.21

69727 • WDP-LS1-W-3C-XX • 4 000 K • 1 884 lm

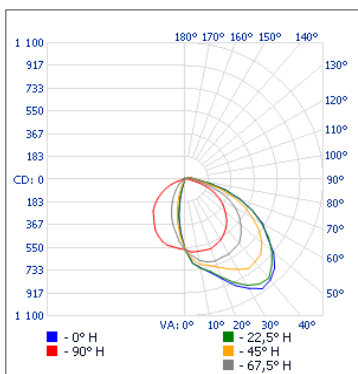

Zone	Lumens	% Fixture
0-30	418.5	22.2
0-40	712.8	37.8
0-60	1 315.4	71.7
60-90	434.5	23.1
70-100	225.2	12
90-120	71.0	3.8
0-90	1 785.9	94.8
90-180	98.1	5.2
0-180	1 884.1	100

Center beam fc		Beam width	
17.0'	1.96 fc	23.0'	35.6'
34.0'	0.49 fc	45.9'	71.2'
51.0'	0.22 fc	68.9'	106.8'
68.0'	0.12 fc	91.9'	142.5'
85.0'	0.08 fc	114.8'	178.1'
102.0'	0.05 fc	137.8'	213.7'



68.1°

92.7°

Vert. spread:

Horiz. spread:

Qty	Description	Price
-----	-------------	-------

Date: