

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# WSL CHOICE

## LED SLIM WALL PACK

3 CCT AND 3 POWER SELECTABLE  
INTEGRATED PHOTOCELL

### ORDERING INFORMATION

**Order code:** 69722  
**Model number:** WSL-PS80-Q-3C-BK/CHOICE  
**UPC:** 069549029439  
**Case quantity:** 1  
**DLC unique ID:** S-7XXNXV

### PHYSICAL DATA

**Finish:** Black  
**Housing material:** Die-cast aluminum  
**Lens material:** Prismatic tempered glass

### PERFORMANCE DATA

**Watts (W):** 40/60/80  
**Volts (V AC):** 120-347  
**Color temperature (K)<sup>1</sup>:** 3 000/4 000/5 000  
**Lumen output (lm)<sup>2</sup>:** 5 600/8 400/11 200  
**Efficacy (lm/W):** 140  
**CRI:** 80+  
**Life L70 (h)<sup>3</sup>:** 50 000  
**THD (%):** 20  
**IP rating:** IP65  
**IK rating:** IK08  
**Dimming:** 0-10 V  
**B.U.G. rating:** B1 U3 G4  
**Power factor:** 0.91  
**Photocell:** Yes  
**Surge protection (kV):** 6  
**Operating temp. range:** -40°C to 40°C (-40°F to 104°F)

<sup>1</sup> Typical colour temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

### LUMEN SPECIFICATION TABLE

| Watts<br>(W) | 3 000 K           |                 | 4 000 K           |                 | 5 000 K           |                 |
|--------------|-------------------|-----------------|-------------------|-----------------|-------------------|-----------------|
|              | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) | Lumen output (lm) | Efficacy (lm/W) |
| 40           | 5 480             | 136             | 5 649             | 142             | 5 830             | 144             |
| 60           | 7 979             | 134             | 8 321             | 142             | 8 459             | 141             |
| 80           | 10 451            | 131             | 10 930            | 138             | 10 982            | 137             |

#### DEFAULT PROGRAMMING

80 W / 4 000 K

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.  
Data is based upon tests performed in a controlled environment.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.




Black



ACCESSORY (order separately)

| Order code | Type      |
|------------|-----------|
| 69725      | Wireguard |




COMPATIBLE DIMMERS<sup>1</sup>

| Brand   | Model                   |
|---------|-------------------------|
| Lutron  | NTSTV-DV, NFTV, DDTV-WH |
| Leviton | DS710, IP710            |
| Legrand | H4FBL3PW                |

Dimming range: 0%-100%

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

DIMENSIONS AND WEIGHTS

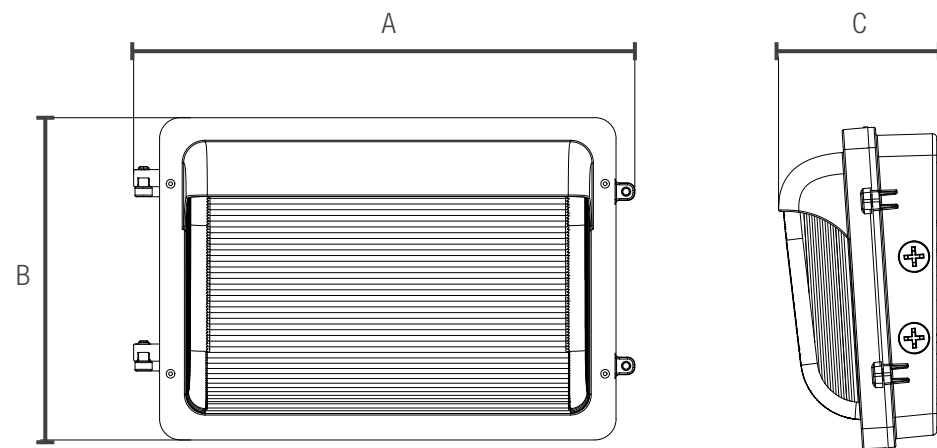


|                  |              |
|------------------|--------------|
| A in. (mm)       | 13.82" (351) |
| B in. (mm)       | 8.88" (2263) |
| C in. (mm)       | 4.48" (114)  |
| Net weight (lbs) | 9.1          |

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

PHOTOMETRIC DATA<sup>1</sup>

69722 • WSL-PS80-Q-3C-BK/CHOICE • 80 W • 4 000 K • 10 920 lm

Polar candela distribution

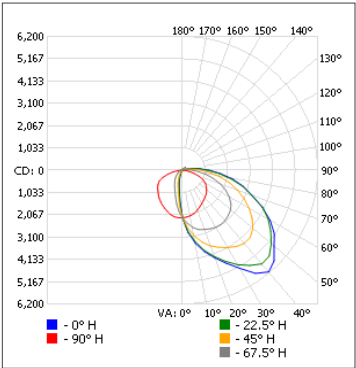

Zonal lumen summary

| Zone   | Lumens   | % Fixture |
|--------|----------|-----------|
| 0-30   | 1 834.0  | 16.8      |
| 0-40   | 3 278.2  | 30        |
| 0-60   | 6 779.8  | 62.1      |
| 60-90  | 3 376.2  | 30.9      |
| 70-100 | 2 127.7  | 19.5      |
| 90-120 | 555.9    | 5.1       |
| 0-90   | 10 156.0 | 93        |
| 90-180 | 763.7    | 7         |
| 0-180  | 10 919.8 | 100       |

Illuminance at a distance

| Center beam fc      |         | Beam width           |       |
|---------------------|---------|----------------------|-------|
| 1.7'                | 763 fc  | 2.2'                 | 3.5'  |
| 3.3'                | 203 fc  | 4.3'                 | 6.8'  |
| 5.0'                | 88.2 fc | 6.6'                 | 10.3' |
| 6.7'                | 49.1 fc | 8.8'                 | 13.8' |
| 8.3'                | 32.0 fc | 10.9'                | 17.0' |
| 10.0'               | 22.1 fc | 13.1'                | 20.5' |
| Vert. spread: 66.5° |         | Horiz. spread: 91.5° |       |

<sup>1</sup> Complete IES files available on our website.

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.