

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WPS GEN 5

CLASSIC WALL PACK

3 CCT and Power Selectable
 Integrated Photocell
 Multi-Voltage (120-347 V)

ORDERING INFORMATION

Order code: 70125
Model number: WPS-PS100B-Q-3C-WH
UPC: 069549031975
Case quantity: 1
DLC unique ID: S-1PY77J

PHYSICAL DATA

Lens material: Prismatic tempered glass lens
Finish: White
Housing material: Die cast aluminum
Photocell: Yes

PERFORMANCE DATA

Watts (W): 60/80/100
Volts (V AC): 120-347
Color temperature (K): 3 000/4 000/5 000
Lumen output (lm): 8819-14554
Efficacy (lm/W): 153-156
CRI: 80+
Life L70 (h): 50,000
Tested LM-80 (h): 9,000
Photocell included: Yes
Dimming: Yes
THD (%): 20
Surge Protection (kV): 6
LED current (mA): 410
Power factor: 0.9
Operating temp. range: -40 °C to 50 °C (-40 °F to 122 °F)

¹ Typical color temperature range: +/- 5 %.


² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

ACCESSORIES (order separately)

Order code	Description
69915	Wireguard
70126	White glareshield

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



ICES
005




CONFIGURABLE TECHNICAL SPECIFICATION TABLE

Order code	Model number	Watts (W)	3 000 K		4 000 K		5 000 K	
			Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)	Lumen output (lm)	Efficacy (lm/W)
70125	WPS-PS100B-Q-3C-WH	60	8 678	149	8 819	154	8 699	149
		80	11 678	146	12 053	153	11 741	146
		100	13 574	142	14 554	156	13 676	143

DEFAULT PROGRAMMING


70125: 100 W / 4 000 K

DIMENSIONS AND WEIGHT

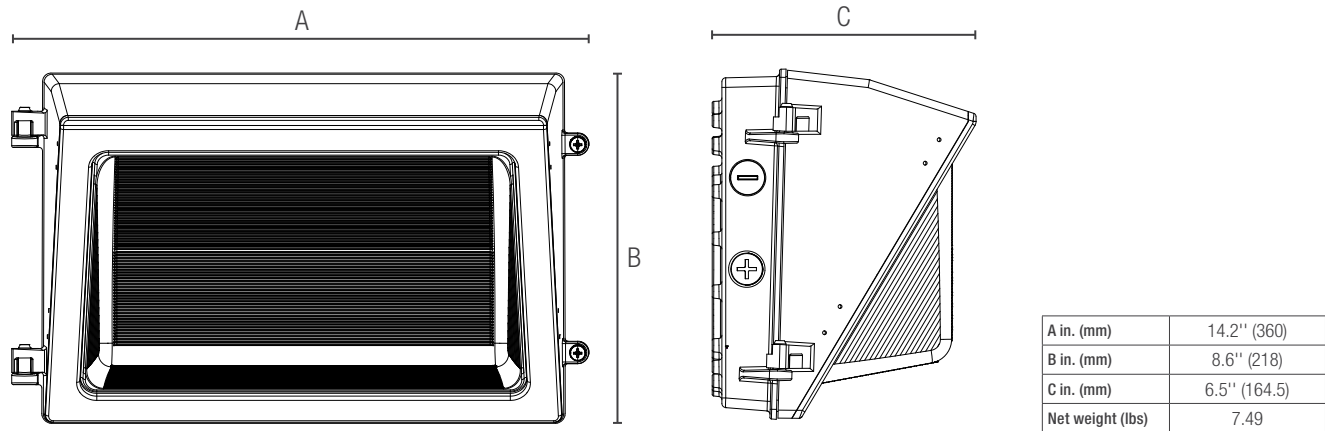PHOTOMETRIC DATA¹

70125 • WPS-PS100B-W-3C-XX • 100 W • 4 000 K • 14 554 lm

Polar candela distribution

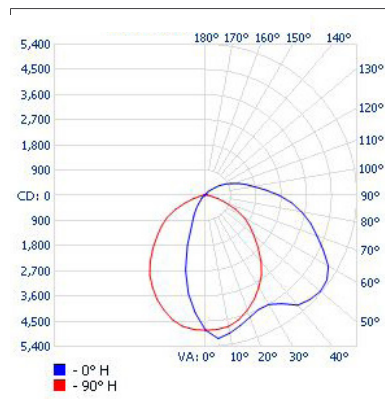

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	3 143.2	21.7
0-40	4 902.9	33.81
0-60	8 682.7	59.81
60-90	4 080.0	28.1
70-100	3 064.9	21.1
90-120	1 436.1	9.9
0-90	12 762.8	87.9
90-180	1 749.2	12.1
0-180	14 512.0	100

Illuminance at a distance

Center beam fc		Beam width	
8.3'	70.0 fc	21.7'	18.7'
16.7'	17.3 fc	43.6'	37.7'
25.0'	7.71 fc	65.3'	56.4'
33.3'	4.35 fc	87.0'	75.1'
41.7'	2.77 fc	108.9'	94.1'
50.0'	1.93 fc	130.6'	112.8'

■ Vert. spread: 105.1°
■ Horiz. spread: 96.9°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.