

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

WAY

LED STEP LIGHTS

ORDERING INFORMATION

Order code: 69749
Model number: ASWA-H-5W-A-30WH
UPC: 069549029705
Case quantity: 18

PHYSICAL DATA

Size in. (cm): 5 (12.6) x 3 1/8" (7.8)
Lens material: Acrylic lens with frosted finish
Housing material: Die-cast housing
Housing finish: White
Mounting: Recessed wall-mounted, horizontal
Daisy chain: Up to 20 fixtures

PERFORMANCE DATA

Watts (W): 5
Volts (V AC): 120
Color temperature (K)¹: 3 000
Initial lumen output (lm)²: 150
Efficacy (lm/W)³: 30
CRI: 90+
Life L70 (h)⁴: 50 000
Dimming: Phase cut (ELV / Triac) dimming standard
Power factor: ≥0.90
Frequency (Hz): 60
Operating temp. range: -30 °C to 40 °C (-22 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %.

² Total lumen values. Lumen range: +/- 10%.

³ Efficacy is derived from initial lumen output value.

⁴ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

COMPATIBLE DIMMERS¹

Brand	Model
COOPER	DAL06P, AAL06
LEVITON	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
LUTRON	HCL453P, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, DVELV-300P, SELV-300P, MACL-153P


DIMMING RANGE: 5%-100%

¹ This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.

Data is based upon tests performed in a controlled environment.

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

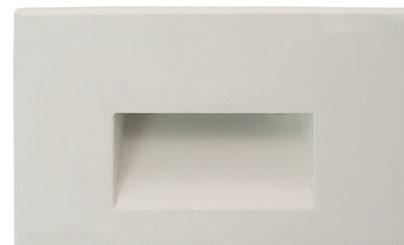

quick
ship



LED
fixture



dimmmable



wet
location




ICES
005




Intertek

DIMENSIONS AND WEIGHT

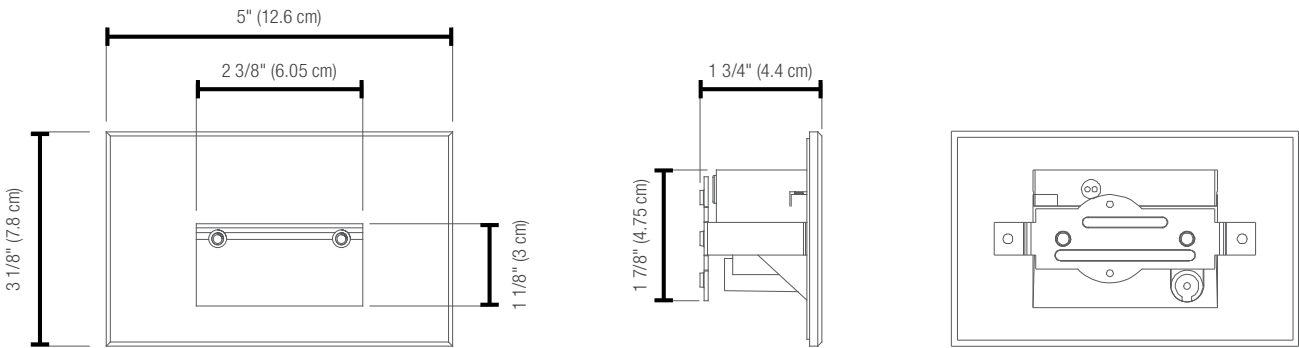


Net weight (lbs)	0.46
------------------	------

SPACING RECOMMENDATION¹

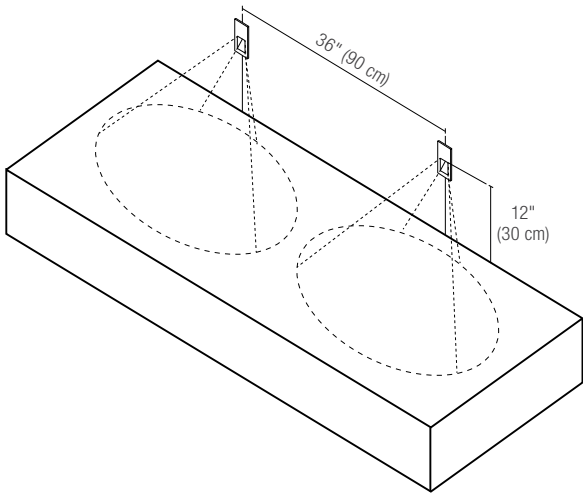

¹ Drawing is for reference only. Step light model may vary.

LIGHT SPREAD

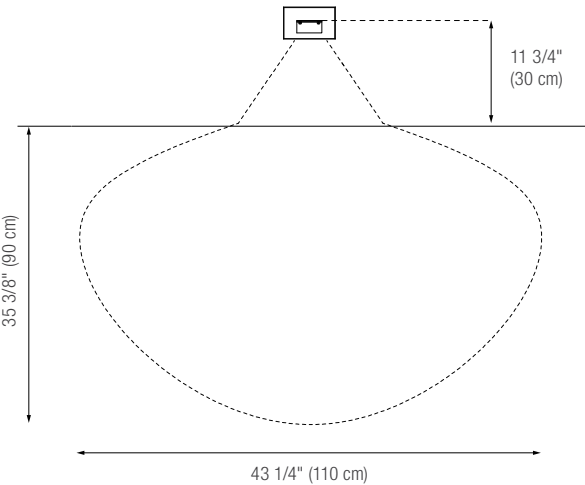

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.